


E12353



Wirable plug

SSTA040MSSFKSG

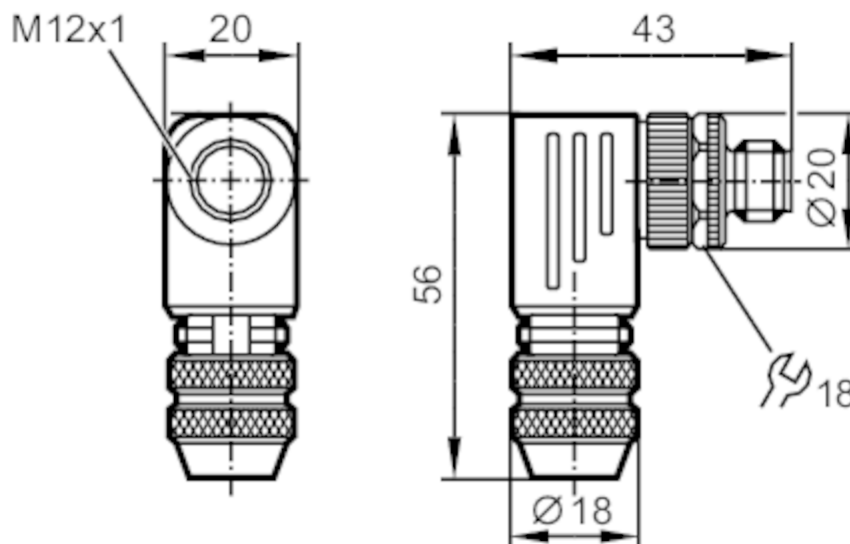

Application

Free from silicone ☐ yes

Electrical data

Operating voltage [V] ☐ < 250 AC/DC

Max. current load total [A] ☐ 4; (...40 °C)

Operating conditions

Ambient temperature [°C] ☐ -40...85

Protection ☐ IP 67

Mechanical data

Weight [g] ☐ 66.2

Dimensions [mm] ☐ 42 x 20 x 54

Materials ☐ diecast zinc nickel-plated

Material nut ☐ diecast zinc

Remarks

Pack quantity ☐ 1 pcs.

Electrical connection

screw terminals: ...0.75 mm²; Cable sheath: Ø 6...8 mm

Electrical connection - plug

Connector: 1 x M12, angled; Moulded body: diecast zinc, nickel-plated; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: shieldable

E12353

Wirable plug

SSTA040MSSFKSG



Connection

