


E12404



Connecting cable with socket

ADOGH080MSS0010K08

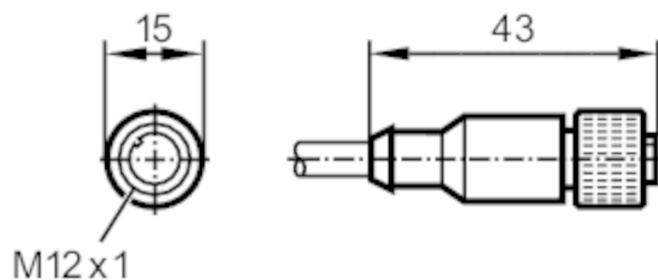

Electrical data

Operating voltage	[V]	< 30 AC / < 36 DC
Protection class		III
Max. current load total	[A]	2

Operating conditions

Ambient temperature	[°C]	-25...90
Protection		IP 67

Mechanical data

Weight	[g]	742.6
Dimensions	[mm]	15 x 15 x 43
Materials		TPU
Material nut		brass

Remarks

Notes	For 8-pole sockets the core colours are not standardised.; Please note the wiring of the sensor and the sockets (see data sheet).
Pack quantity	1 pcs.

Electrical connection

Cable: 10 m, PUR, black, shielded; 8 x 0.25 mm² (14 x Ø 0.15 mm)

Electrical connection - socket

Connector: 1 x M12, straight; Moulded body: TPU; Locking: brass, nickel-plated; Tightening torque: 1...1.5 Nm; Shielded connection cable: screen connected

E12404




Connecting cable with socket

ADOGH080MSS0010K08



Connection

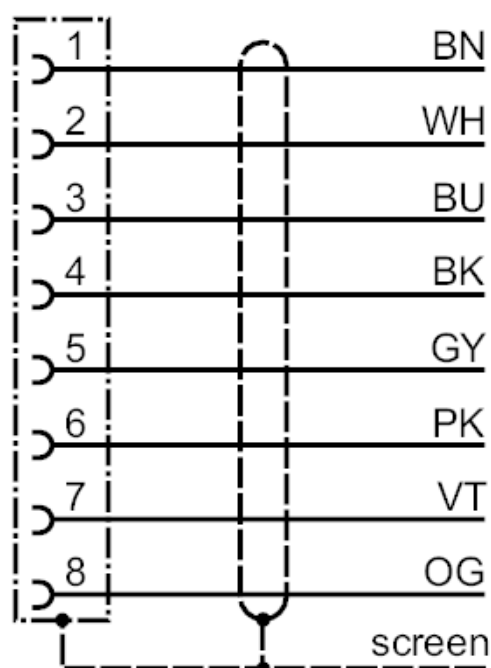

colours to DIN EN 60947-5-2

Core colours :

BK =	black
BN =	brown
BU =	blue
GY =	grey
PK =	pink
OG =	orange
VT =	lilac
WH =	white
screen =	screen