




Ethernet connection cable

VSTGN040ZDS00,5L04STGN040ZDS

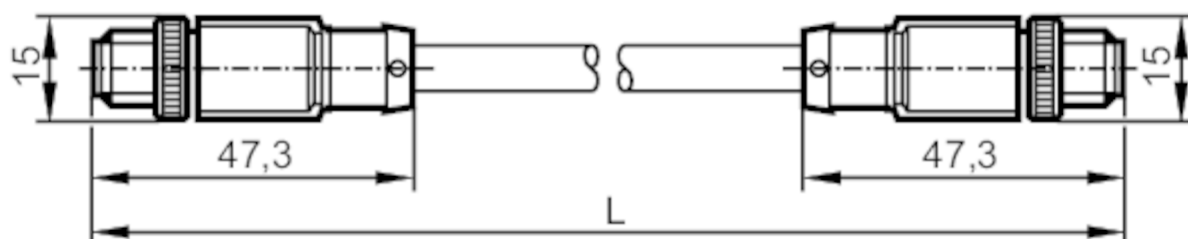

Application

Design

Ethernet cable

Electrical data

Operating voltage	[V]	< 50 AC / < 60 DC
Protection class		III
Max. current load total	[A]	4

Operating conditions

Ambient temperature	[°C]	-20...90
Protection		IP 67

Mechanical data

Weight	[g]	73.8
Dimensions	[mm]	15 x 15 x 47.3
Materials		TPU
Material nut		diecast zinc / diecast zinc

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 0.5 m, PVC, green, shielded; 4 x 0.34 mm²

Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected

Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected

E12422



Ethernet connection cable

VSTGN040ZDS00,5L04STGN040ZDS



Connection

