




Ethernet connection cable

VSTGN040ZDS0020L04STGH040ZDS

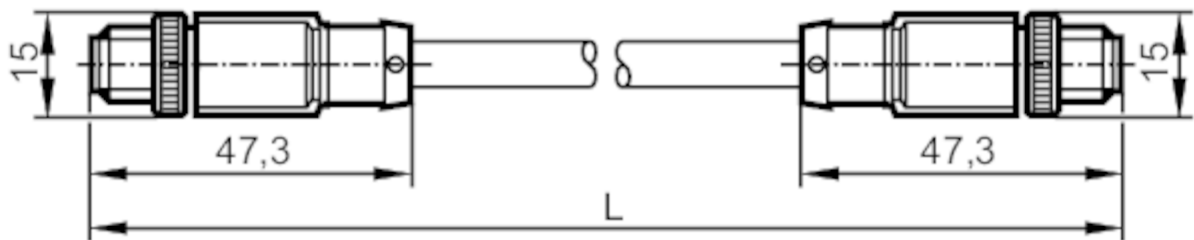

Application		
Design	Ethernet cable	
Electrical data		
Operating voltage	[V]	< 50 AC / < 60 DC
Protection class		III
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-20...90
Protection		IP 67
Mechanical data		
Weight	[g]	1407.2
Dimensions	[mm]	15 x 15 x 47.3
Materials		TPU
Material nut		diecast zinc / diecast zinc
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 20 m, PVC, green, shielded; 4 x 0.34 mm²		
Electrical connection - plug		
Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected		
Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected		

E12423



Ethernet connection cable

VSTGN040ZDS0020L04STGH040ZDS



Connection

