


E12429



Connection cable

VDOGD040ZDS0020H04STGD040ZDS

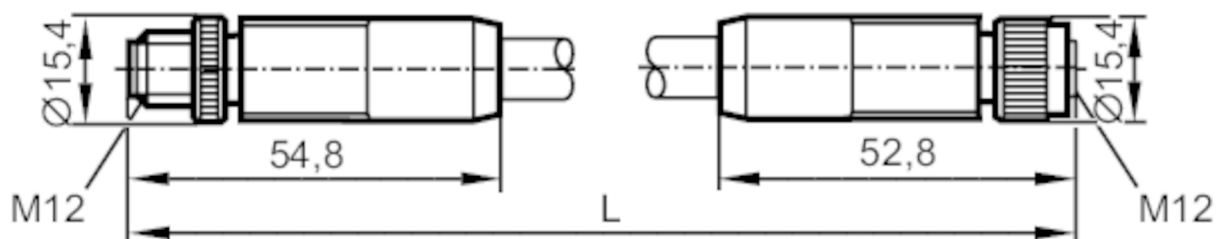

Application

Design power cable

Electrical data

Operating voltage [V] < 60 AC

Max. current load total [A] 12

Operating conditions

Ambient temperature [°C] -25...85

Protection IP 67

Mechanical data

Weight [g] 2090.2

Dimensions [mm] 15.4 x 15.4 x 54.8

Materials PUR

Material nut diecast zinc

Remarks

Pack quantity 1 pcs.

Electrical connection

Cable: 20 m, PUR, black; 4 x 1.5 mm²

Electrical connection - socket


Connector: 1 x M12, straight; Moulded body: PUR

E12429




Connection cable

VDOGD040ZDS0020H04STGD040ZDS



Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: PUR; Locking: diecast zinc, nickel-plated; Contacts: gold-plated



Connection

