


E12430



Connecting cable with socket

ADOGD040ZDS0002H04

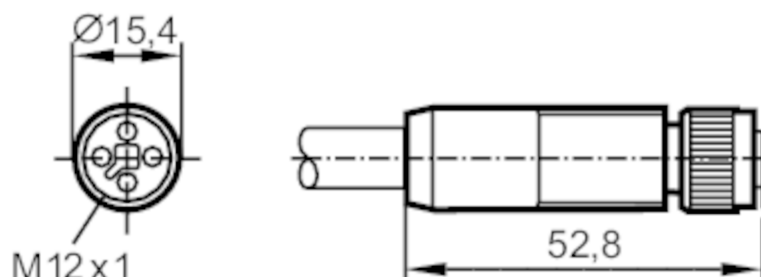

Application

Design power cable

Electrical data

Operating voltage [V] < 60 AC

Max. current load total [A] 12

Operating conditions

Ambient temperature [°C] -25...85

Protection IP 67

Mechanical data

Weight [g] 238.6

Dimensions [mm] 15.4 x 15.4 x 52.8

Materials TPU

Material nut diecast zinc / diecast zinc

Remarks

Pack quantity 1 pcs.

Electrical connection

Cable: 2 m, PUR, black, Ø 8 mm; 4 x 1.5 mm²

Electrical connection - socket

Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated


Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated

E12430




Connecting cable with socket

ADOGD040ZDS0002H04



Connection

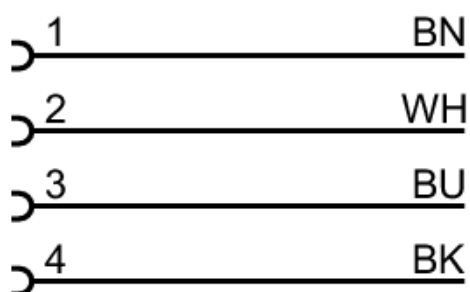

Core colours :

BK =	black
BN =	brown
BU =	blue
WH =	white