


# E12436



## Connecting cable with plug

ASTGH080MSS0002H08

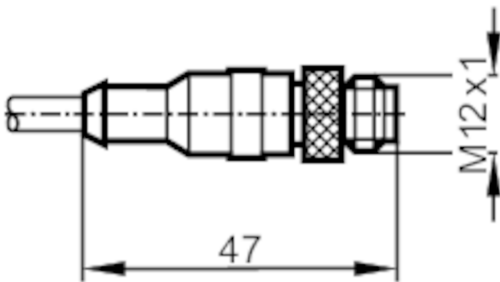

### Electrical data

|                   |     |                   |
|-------------------|-----|-------------------|
| Operating voltage | [M] | < 30 AC / < 36 DC |
|-------------------|-----|-------------------|

### Operating conditions

|                     |      |          |
|---------------------|------|----------|
| Ambient temperature | [°C] | -25...80 |
| Protection          |      | IP 67    |

### Mechanical data

|              |     |       |
|--------------|-----|-------|
| Weight       | [g] | 132.8 |
| Materials    |     | PUR   |
| Material nut |     | brass |

### Remarks


|               |  |        |
|---------------|--|--------|
| Pack quantity |  | 1 pcs. |
|---------------|--|--------|

### Electrical connection

|                                                              |
|--------------------------------------------------------------|
| Cable: 2 m, PUR, Halogen-free, black, Ø 6.8 mm; 8 x 0.25 mm² |
|--------------------------------------------------------------|

### Electrical connection - plug

|                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------|
| Connector: 1 x M12, straight; Moulded body: PUR; Locking: brass, nickel-plated; Tightening torque: 0.7...0.9 Nm |
|-----------------------------------------------------------------------------------------------------------------|



# E12436



## Connecting cable with plug

ASTGH080MSS0002H08

### Connection

|   |    |
|---|----|
| 1 | BN |
| 2 | WH |
| 3 | BU |
| 4 | BK |
| 5 | GY |
| 6 | PK |
| 7 | VT |
| 8 | OG |

colours to DIN EN 60947-5-2

Core colours :

|      |        |
|------|--------|
| BK = | black  |
| BN = | brown  |
| BU = | blue   |
| GY = | grey   |
| PK = | pink   |
| OG = | orange |
| VT = | lilac  |
| WH = | white  |