


E12494



Connecting cable with socket

ADOGD040ZDS00,5H04

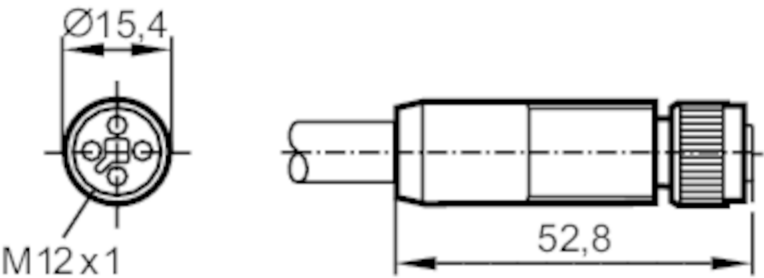


Application		
Design		power cable
Electrical data		
Operating voltage	[V]	< 60 AC
Max. current load total	[A]	12
Operating conditions		
Ambient temperature	[°C]	-25...85
Protection		IP 67
Mechanical data		
Weight	[g]	84.4
Dimensions	[mm]	15.4 x 15.4 x 52.8
Materials		TPU
Material nut		diecast zinc / diecast zinc
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 0.5 m, PUR, black, Ø 8 mm; 4 x 1.5 mm²		
Electrical connection - socket		
Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated		
Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated		

E12494




Connecting cable with socket

ADOGD040ZDS00,5H04



Connection

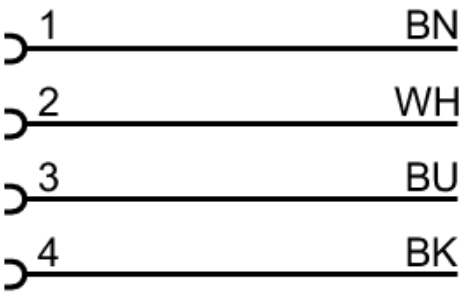

Core colours :

BK =	black
BN =	brown
BU =	blue
WH =	white