


E12498



Connecting cable with socket

ADOGD040ZDS0050H04

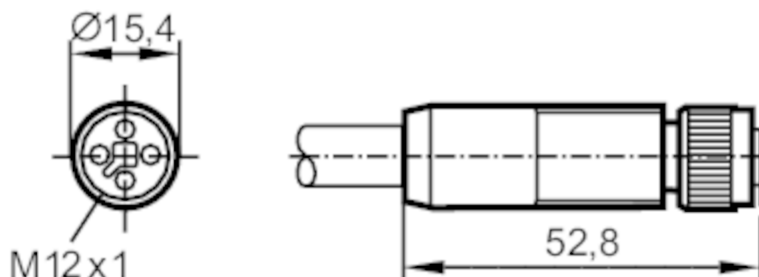

Application

Design	power cable
--------	-------------

Electrical data

Operating voltage	[V]	< 60 AC
Max. current load total	[A]	12

Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 67

Mechanical data

Weight	[g]	5215.2
Dimensions	[mm]	15.4 x 15.4 x 52.8
Materials		TPU
Material nut		diecast zinc / diecast zinc

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 50 m, PUR, black, Ø 8 mm; 4 x 1.5 mm²

Electrical connection - socket


Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated
Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated

E12498




Connecting cable with socket

ADOGD040ZDS0050H04



Connection

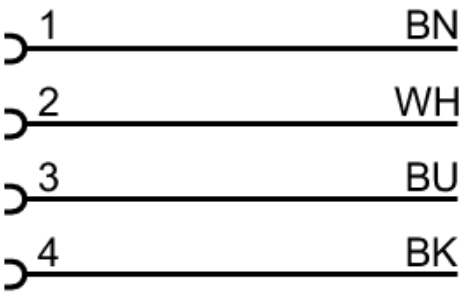

	Core colours :
BK =	black
BN =	brown
BU =	blue
WH =	white