




Wirable socket

SDOGD040ZDSFKP

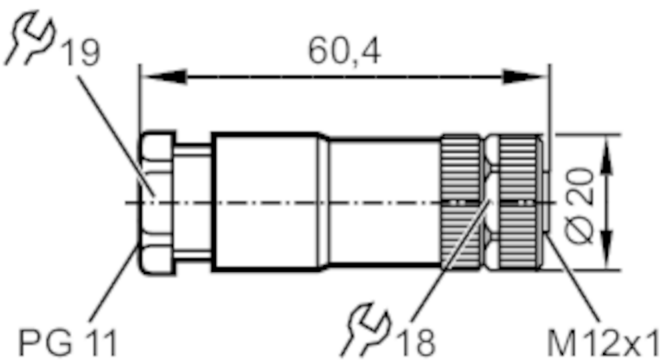

Application		
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 60 DC
Max. current load total	[A]	12; (when using conductors with 1.5 mm²)
Operating conditions		
Ambient temperature	[°C]	-40...85
Protection		IP 67
Mechanical data		
Weight	[g]	29
Materials		connector housing: PA; Sealing: NBR
Material nut		diecast zinc
Remarks		
Pack quantity		1 pcs.
Electrical connection		
screw terminals: 0.75...1.5 mm²; Cable sheath: Ø 8...10 mm		
Electrical connection - socket		
Connector: 1 x M12, straight; Locking: diecast zinc; Contacts: gold-plated; Tightening torque: 0.4 Nm		

E12499

Wirable socket

SDOGD040ZDSFKP



Connection

