


E12500



Wirable plug

SSTGH040ZDSFKG

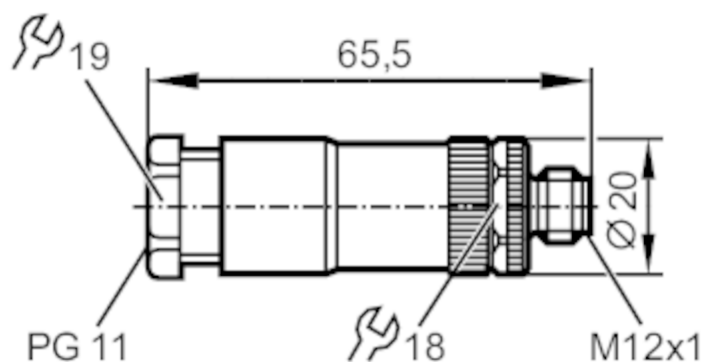

Application

Free from silicone	yes
--------------------	-----

Electrical data

Operating voltage	[V]	< 60 DC
Max. current load total	[A]	12; (when using conductors with 1.5 mm ²)

Operating conditions

Ambient temperature	[°C]	-40...85
Protection		IP 67

Mechanical data

Weight	[g]	29
Dimensions	[mm]	20 x 20 x 65.5
Materials		connector housing: PA; Sealing: NBR
Material nut		diecast zinc

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

screw terminals: 0.75...1.5 mm²; Cable sheath: Ø 8...10 mm

Electrical connection - plug

Connector: 1 x M12, straight; Locking: diecast zinc; Contacts: gold-plated; Tightening torque: 0.4 Nm

E12500

Wirable plug

SSTGH040ZDSFKG



Connection

