


E12512



Connecting cable with plug

ASTGH040ZDS0010H04

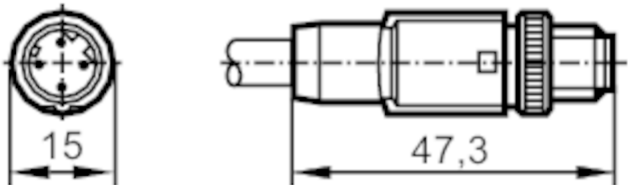

Application		
Design		Ethernet cable
Electrical data		
Operating voltage	[V]	< 250 AC/DC
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-40...70
Protection		IP 67
Mechanical data		
Weight	[g]	710.8
Dimensions	[mm]	15 x 15 x 47.3
Materials		TPU
Material nut		diecast zinc
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 10 m, PVC, green, Ø 6.5 mm; 4 x 0.34 mm²		
Electrical connection - plug		
Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected		

E12512




Connecting cable with plug

ASTGH040ZDS0010H04



Connection

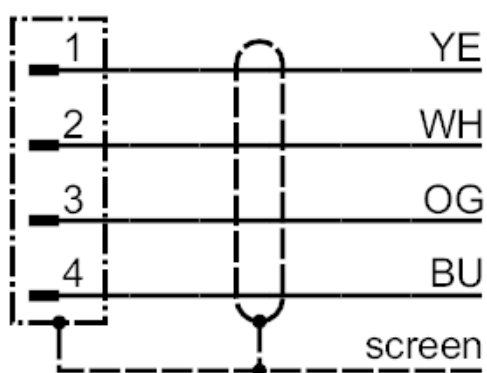

Core colours :

BU =

blue

OG =

orange

WH =

white

YE =

yellow