




Fibre optic through beam sensor

FE-00-P-A-E2,5

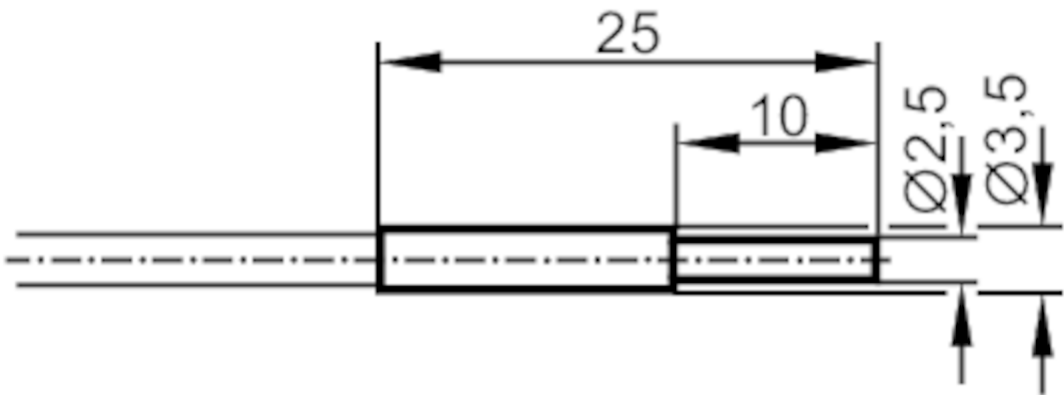

Application		
Function principle		Through-beam sensor
Detection zone		
Range with fibre optic amplifier type		OKF; OUF; OOF
OKF		
Range of fibre optics	[mm]	120
OOF		
Range of fibre optics	[mm]	400
OUF		
Range of fibre optics	[mm]	120
Operating conditions		
Ambient temperature	[°C]	-20...80

E20060



Fibre optic through beam sensor

FE-00-P-A-E2,5

Mechanical data	
Weight	[g] 52.6
Version of sensing head	straight
Sensing head diameter	[mm] 2.5
Sensing head length	[mm] 10
Total length	[mm] 600
Min. bending radius	[mm] 10
Fibre arrangement	●
Materials	Adapter: PPE
Fibre material	glass
Fibre head material	aluminium
Fibre sheath material	PVC
Accessories	
Accessories (supplied)	E20106
Remarks	
Pack quantity	1 pcs.