




Fibre optic through beam sensor

FE-00-P-V-E1

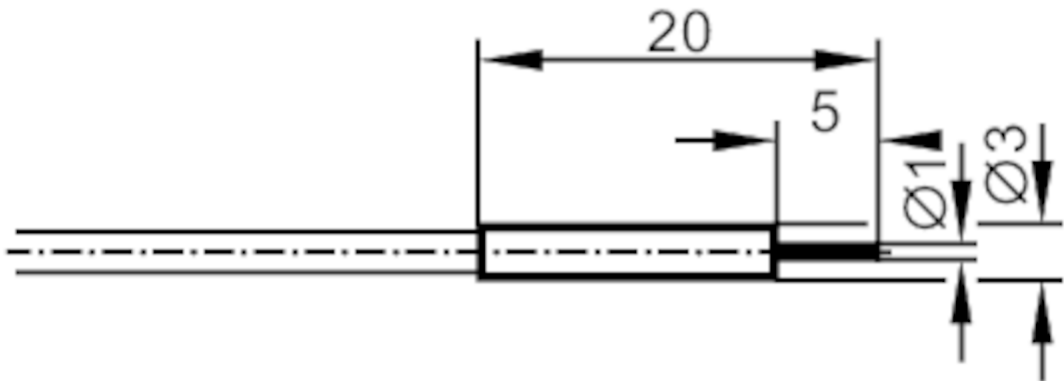

Application		
Function principle		Through-beam sensor
Detection zone		
Range with fibre optic amplifier type		OKF; OUF; OOF
OKF		
Range of fibre optics	[mm]	50
OOF		
Range of fibre optics	[mm]	160
OUF		
Range of fibre optics	[mm]	50
Operating conditions		
Ambient temperature	[°C]	-20...80

E20061



Fibre optic through beam sensor

FE-00-P-V-E1

Mechanical data	
Weight [g]	48.4
Version of sensing head	straight
Sensing head diameter [mm]	1
Sensing head length [mm]	5
Total length [mm]	600
Min. bending radius [mm]	10
Fibre arrangement	●
Materials	Adapter: PPE
Fibre material	glass
Fibre head material	stainless steel (1.4305 / 303)
Fibre sheath material	PVC
Accessories	
Accessories (supplied)	E20107
Remarks	
Pack quantity	1 pcs.