




Fibre optic diffuse reflection sensor

FT-00-M-E3

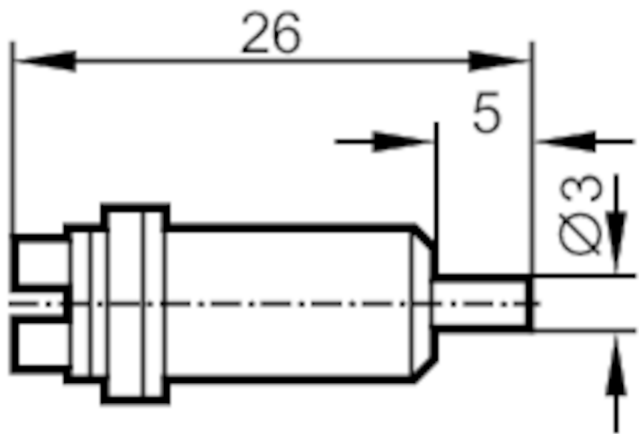

Application		
Function principle		Diffuse reflection sensor
Detection zone		
Range with fibre optic amplifier type		OKF; OUF
OKF		
Range fibre optics	[mm]	40
OUF		
Range fibre optics	[mm]	40
Operating conditions		
Ambient temperature	[°C]	-20...80
Mechanical data		
Weight	[g]	12.6
Version of sensing head		straight
Sensing head diameter	[mm]	3
Total length	[mm]	26
Fibre arrangement		⊙
Fibre material		glass
Fibre head material		brass

E20078



Fibre optic diffuse reflection sensor

FT-00-M-E3

Remarks

Pack quantity	1 pcs.
---------------	--------