


E20080



Fibre optic diffuse reflection sensor

FT-00-A-A-E3/1M

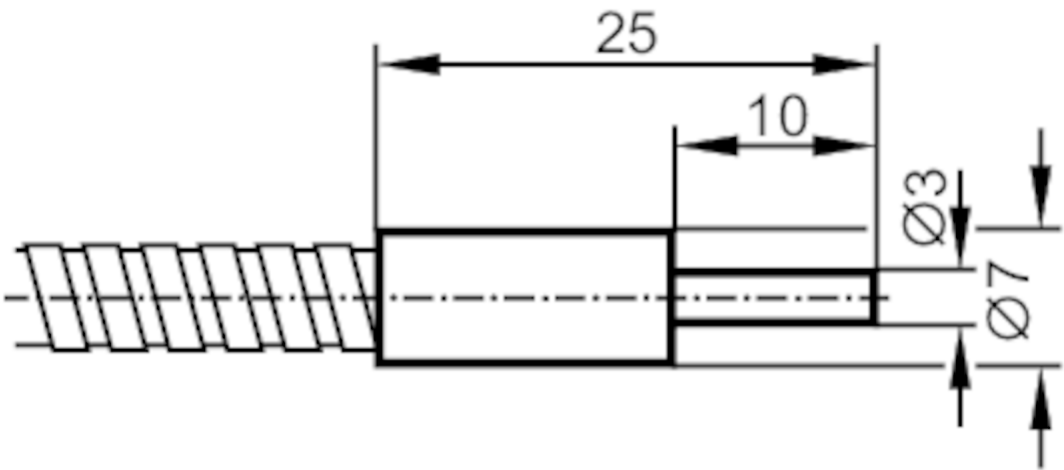

Application		
Function principle		Diffuse reflection sensor
Detection zone		
Range with fibre optic amplifier type		OKF; OUF; OOF
OKF		
Range fibre optics	[mm]	40
OOF		
Range fibre optics	[mm]	200
OUF		
Range fibre optics	[mm]	40
Operating conditions		
Ambient temperature	[°C]	-40...290

E20080



Fibre optic diffuse reflection sensor

FT-00-A-A-E3/1M

Mechanical data	
Weight [g]	65
Version of sensing head	straight
Sensing head diameter [mm]	3
Total length [mm]	1000
Min. bending radius [mm]	20; (for fixed installation)
Fibre arrangement	⓪
Materials	Adapter: ABS
Fibre material	glass
Fibre head material	aluminium
Fibre sheath material	aluminium
Accessories	
Accessories (supplied)	E20102
Remarks	
Pack quantity	1 pcs.