




Fibre optic diffuse reflection sensor

FT-00-P-A-M6/1M

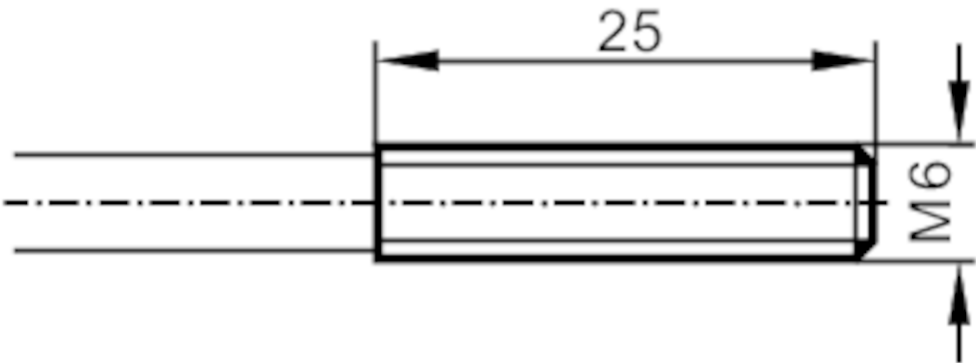

Application		
Function principle		Diffuse reflection sensor
Detection zone		
Range with fibre optic amplifier type		OKF; OUF
OKF		
Range fibre optics	[mm]	40
OUF		
Range fibre optics	[mm]	40
Operating conditions		
Ambient temperature	[°C]	-20...80

E20083



Fibre optic diffuse reflection sensor

FT-00-P-A-M6/1M

Mechanical data	
Weight	[g] 48.4
Version of sensing head	straight
Sensing head thread	M6
Sensing head length	[mm] 25
Total length	[mm] 1000
Min. bending radius	[mm] 20
Fibre arrangement	Ⓜ
Materials	Adapter: PPE
Fibre material	glass
Fibre head material	aluminium
Fibre sheath material	PVC
Accessories	
Accessories (supplied)	hexagon nuts: 2 x M6, stainless steel
	tooth lock washers: 2
	knurled nut: 1 x M11
Remarks	
Pack quantity	1 pcs.