




Fibre optic diffuse reflection sensor

FT-30-A-A-M8/2M

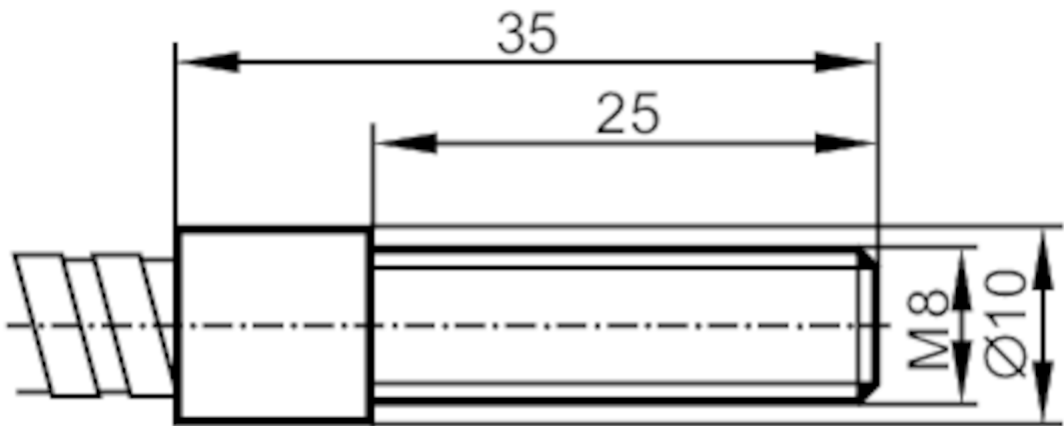

Application		
Function principle		Diffuse reflection sensor
Detection zone		
Range with fibre optic amplifier type		OIF
OIF		
Range fibre optics	[mm]	56
Operating conditions		
Ambient temperature	[°C]	-40...290
Mechanical data		
Weight	[g]	164
Version of sensing head		straight
Sensing head thread		M8
Total length	[mm]	2000
Min. bending radius	[mm]	30; (for fixed installation)
Fibre arrangement		
Materials		Adapter: PA
Fibre material		glass
Fibre head material		aluminium
Fibre sheath material		aluminium

E20148



Fibre optic diffuse reflection sensor

FT-30-A-A-M8/2M

Accessories	
Accessories (supplied)	hexagon nuts: 2 x M8, stainless steel
	tooth lock washers: 2
	knurled nut: 1 x M30
Remarks	
Notes	discontinued article
Pack quantity	1 pcs.