




Fibre optic diffuse reflection sensor

FT-30-A-A-R8

Status Archive

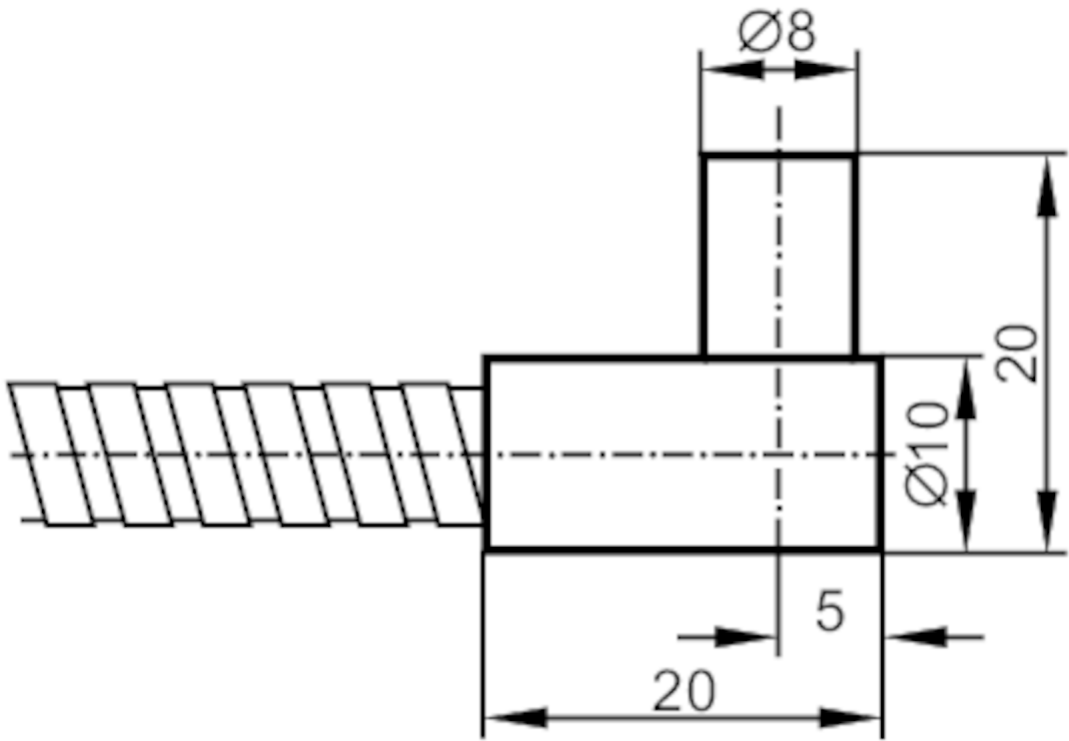

Application	
Function principle	Diffuse reflection sensor
Detection zone	
Range with fibre optic amplifier type	OIF
OIF	
Range fibre optics [mm]	70
Operating conditions	
Ambient temperature [°C]	-40...290

E20153



Fibre optic diffuse reflection sensor

FT-30-A-A-R8

Mechanical data	
Weight	[g] 93.8
Version of sensing head	angled
Sensing head diameter	[mm] 8
Total length	[mm] 600
Min. bending radius	[mm] 30; (for fixed installation)
Fibre arrangement	Ⓜ
Materials	Adapter: PA
Fibre material	glass
Fibre head material	aluminium
Fibre sheath material	aluminium
Accessories	
Accessories (supplied)	E20353
Remarks	
Pack quantity	1 pcs.

Status Archive