




Fibre optic diffuse reflection sensor

FT-30-P-A-M8

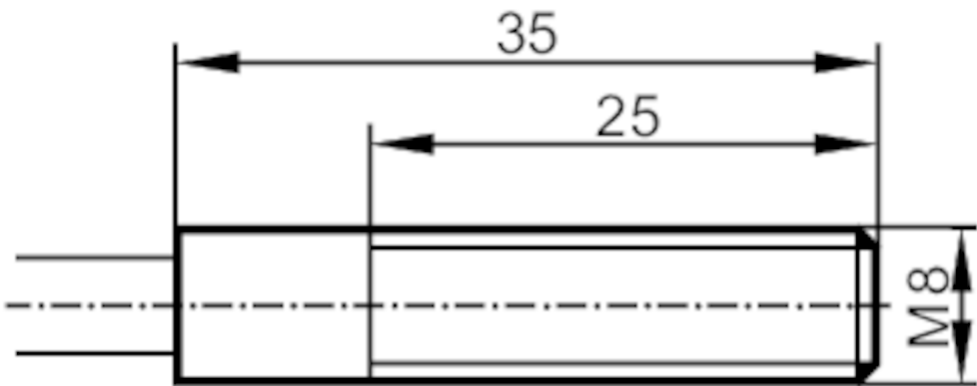

Application		
Function principle	Diffuse reflection sensor	
Detection zone		
Range with fibre optic amplifier type	OIF	
OIF		
Range fibre optics	[mm]	70
Operating conditions		
Ambient temperature	[°C]	-20...80
Mechanical data		
Weight	[g]	89.6
Version of sensing head	straight	
Sensing head thread	M8	
Total length	[mm]	600
Min. bending radius	[mm]	30
Fibre arrangement		
Materials	Adapter: PA	
Fibre material	glass	
Fibre head material	aluminium	
Fibre sheath material	PVC	

E20156



Fibre optic diffuse reflection sensor

FT-30-P-A-M8

Accessories	
Accessories (supplied)	hexagon nuts: 2 x M8, stainless steel
	tooth lock washers: 2
	knurled nut: 1 x M30
Remarks	
Pack quantity	1 pcs.