




Fibre optic through beam sensor

FE-30-A-A-R3

Status Archive

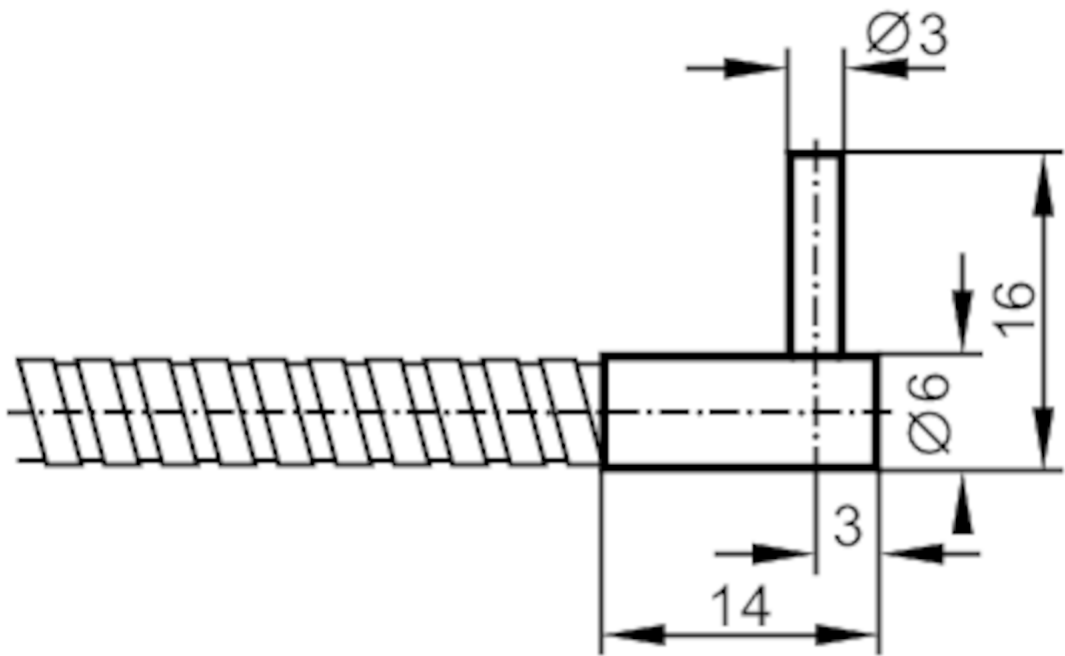

Application		
Function principle	Through-beam sensor	
Detection zone		
Range with fibre optic amplifier type	OIF	
OIF		
Range of fibre optics	[mm]	100
Operating conditions		
Ambient temperature	[°C]	-40...290

E20163



Fibre optic through beam sensor

FE-30-A-A-R3

Mechanical data	
Weight	[g] 88.4
Version of sensing head	angled
Sensing head diameter	[mm] 3
Total length	[mm] 600
Min. bending radius	[mm] 30; (for fixed installation)
Fibre arrangement	●
Materials	Adapter: PA
Fibre material	glass
Fibre head material	aluminium
Fibre sheath material	aluminium
Accessories	
Accessories (supplied)	E20103
Remarks	
Pack quantity	1 pcs.

Status Archive