




Fibre optic through beam sensor

FE-30-P-A-M6

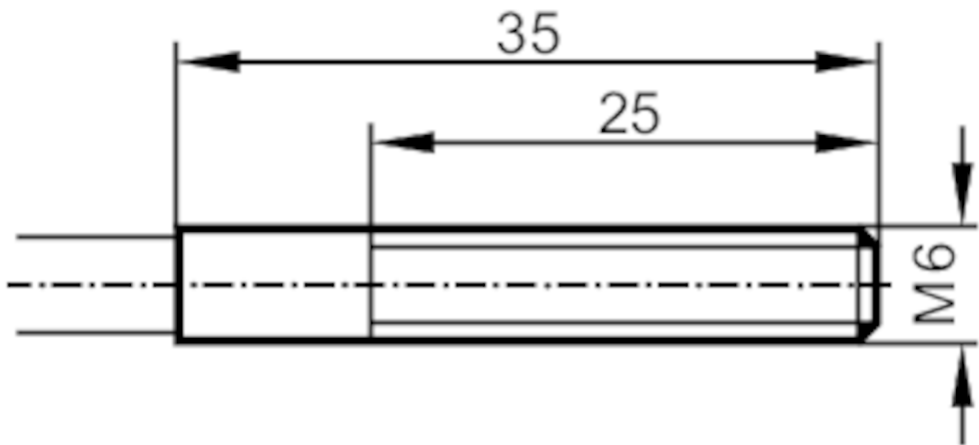

Application		
Function principle	Through-beam sensor	
Detection zone		
Range with fibre optic amplifier type	OIF	
OIF		
Range of fibre optics	[mm]	300
Operating conditions		
Ambient temperature	[°C]	-20...80

E20164



Fibre optic through beam sensor

FE-30-P-A-M6

Mechanical data	
Weight	[g] 85.6
Version of sensing head	straight
Sensing head thread	M6
Sensing head length	[mm] 35
Total length	[mm] 600
Min. bending radius	[mm] 30
Fibre arrangement	●
Materials	Adapter: PA
Fibre material	glass
Fibre head material	aluminium
Fibre sheath material	PVC
Accessories	
Accessories (supplied)	hexagon nuts: 2 x M6, stainless steel
	tooth lock washers: 2
	knurled nut: 1 x M30
Remarks	
Pack quantity	1 pcs.