


Fibre optic diffuse reflection sensor

FT-00-M6

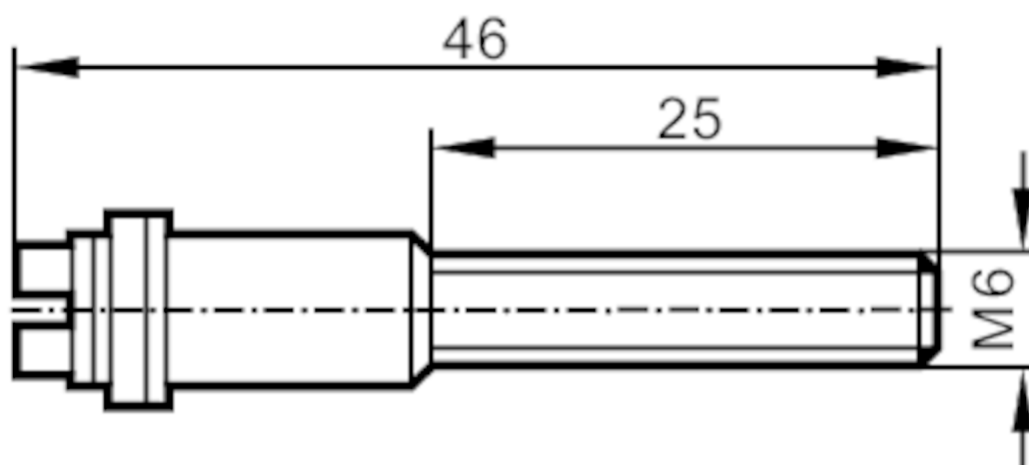

Application

Function principle

Diffuse reflection sensor

Detection zone

Range with fibre optic amplifier type

OKF; OUF; OOF

OKF

Range fibre optics

[mm]

40

OOF

Range fibre optics

[mm]

200

OUF

Range fibre optics

[mm]

40

Operating conditions

Ambient temperature

[°C]

-25...80

Mechanical data

Weight

[g]

20.7

Version of sensing head

straight; with adapter for direct mounting

Total length

[mm]

26

Fibre arrangement



Fibre material

glass

Fibre head material

stainless steel (1.4305 / 303)

E20215



Fibre optic diffuse reflection sensor

FT-00-M6

Accessories	
Accessories (supplied)	hexagon nuts: 4 x M6, stainless steel
	tooth lock washers: 2
	knurled nut: 1 x M11
Remarks	
Notes	discontinued article
Pack quantity	1 pcs.