


Fibre optic through beam sensor

FE-30-A-A-M6/1,5M

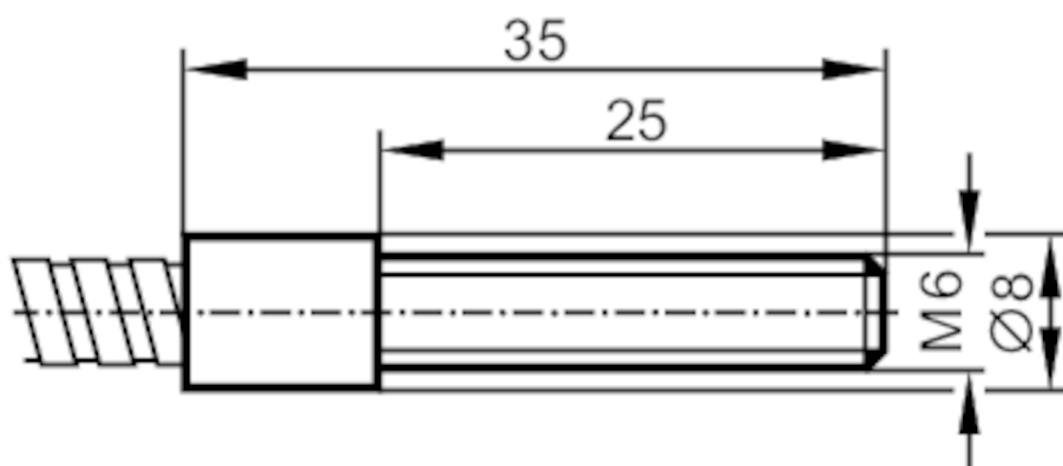

Application

Function principle

Through-beam sensor

Detection zone

Range with fibre optic
amplifier type

OIF

OIF

Range of fibre optics

[mm]

270

Operating conditions

Ambient temperature

[°C]

-40...290

Mechanical data

Weight

[g]

152.6

Version of sensing head

straight

Sensing head thread

M6

Total length

[mm]

1500

Min. bending radius

[mm]

30; (for fixed installation)

Fibre arrangement



Materials

Adapter: PA

Fibre material

glass

Fibre head material

aluminium

Fibre sheath material

aluminium

E20296



Fibre optic through beam sensor

FE-30-A-A-M6/1,5M

Accessories	
Accessories (supplied)	hexagon nuts: 2 x M6, stainless steel
	tooth lock washers: 2
	knurled nut: 1 x M30
Remarks	
Pack quantity	1 pcs.