




Fibre optic through beam sensor

FE-00-M-V-R3

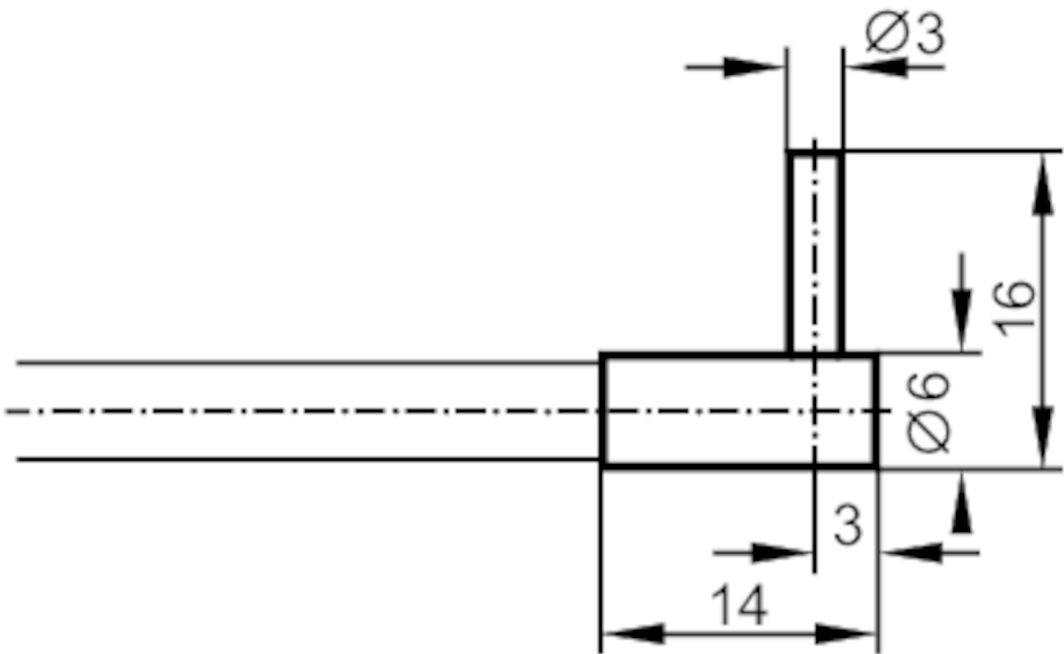

Application		
Function principle		Through-beam sensor
Detection zone		
Range with fibre optic amplifier type		OKF; OUF; OOF
OKF		
Range of fibre optics	[mm]	120
OOF		
Range of fibre optics	[mm]	400
OUF		
Range of fibre optics	[mm]	120
Operating conditions		
Ambient temperature	[°C]	-20...150

E20493



Fibre optic through beam sensor

FE-00-M-V-R3

Mechanical data	
Weight [g]	86.8
Version of sensing head	angled
Sensing head diameter [mm]	3
Sensing head length [mm]	10
Total length [mm]	600
Min. bending radius [mm]	20
Fibre arrangement	
Fibre material	glass
Fibre head material	stainless steel (1.4305 / 303)
Fibre sheath material	metal silicone
Accessories	
Accessories (supplied)	E20103
Remarks	
Pack quantity	1 pcs.