




Fibre optic diffuse reflection sensor

FT-00-M-V-E3/1,5M

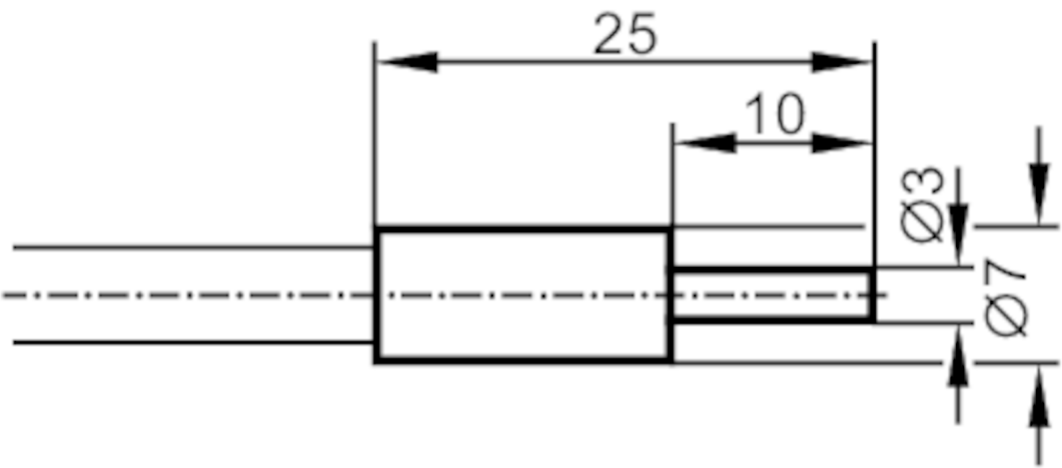

Application		
Function principle		Diffuse reflection sensor
Detection zone		
Range with fibre optic amplifier type		OKF; OUF; OOF
OKF		
Range fibre optics	[mm]	36
OOF		
Range fibre optics	[mm]	180
OUF		
Range fibre optics	[mm]	36
Operating conditions		
Ambient temperature	[°C]	-20...150

E20526



Fibre optic diffuse reflection sensor

FT-00-M-V-E3/1,5M

Mechanical data	
Weight [g]	100.6
Version of sensing head	straight
Sensing head diameter [mm]	3
Sensing head length [mm]	10
Total length [mm]	1500
Min. bending radius [mm]	20
Fibre arrangement	
Fibre material	glass
Fibre head material	stainless steel (1.4305 / 303)
Fibre sheath material	metal silicone
Accessories	
Accessories (supplied)	E20102
Remarks	
Pack quantity	1 pcs.