




Sensing head for fibre optic diffuse reflection sensor

FT-11-EPA-M8x40/F2x1

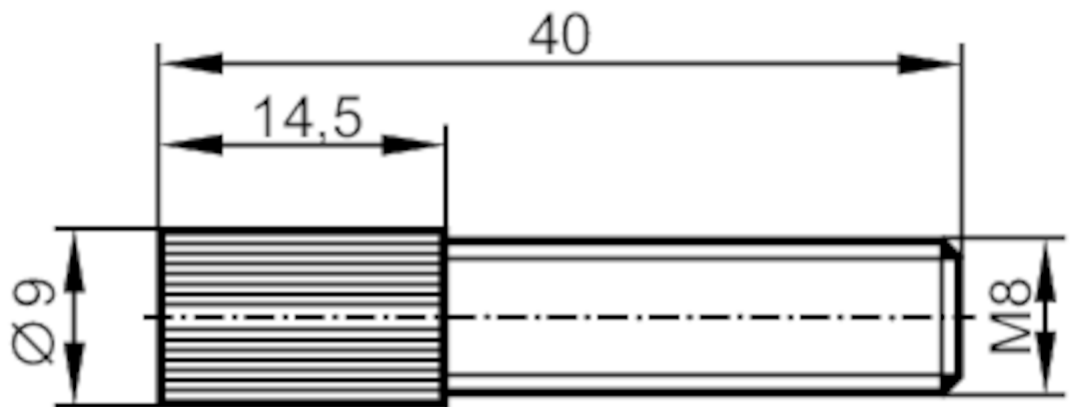

Application		
Function principle		Diffuse reflection sensor
Detection zone		
Range with fibre optic amplifier type		OB50; OBF; OO50
OB50		
Range fibre optics	[mm]	55
OBF		
Range fibre optics	[mm]	110
OO50		
Range fibre optics	[mm]	235
Operating conditions		
Ambient temperature	[°C]	-40...70

E20765



Sensing head for fibre optic diffuse reflection sensor

FT-11-EPA-M8x40/F2x1

Mechanical data		
Weight	[g]	16
Version of sensing head		straight
Sensing head thread		M8
Total length	[mm]	configurable
Fibre arrangement		⊙
Core diameter	[mm]	2 x 1.5
Materials		brass white bronze coated
Fibre material		PMMA
Fibre head material		aluminium
Accessories		
Accessories (supplied)		hexagon nuts: 2 x M8
		washers: 2
Remarks		
Pack quantity		1 pcs.