




Fibre optic through beam sensor

FE-00-M-V-R3/5M

Status Archive

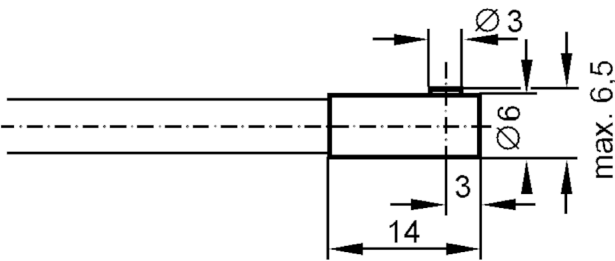

Application		
Function principle		Through-beam sensor
Detection zone		
Range with fibre optic amplifier type		OKF; OUF
OKF		
Range of fibre optics	[mm]	50
OUF		
Range of fibre optics	[mm]	50
Operating conditions		
Ambient temperature	[°C]	-20...80
Mechanical data		
Weight	[g]	366
Total length	[mm]	5000
Min. bending radius	[mm]	20
Fibre arrangement		●
Fibre head material		stainless steel (1.4305 / 303)
Fibre sheath material		metal silicone
Accessories		
Accessories (supplied)		E20103

Status Archive