




Fibre optic diffuse reflection sensor

FT-50-V-V-M5/16

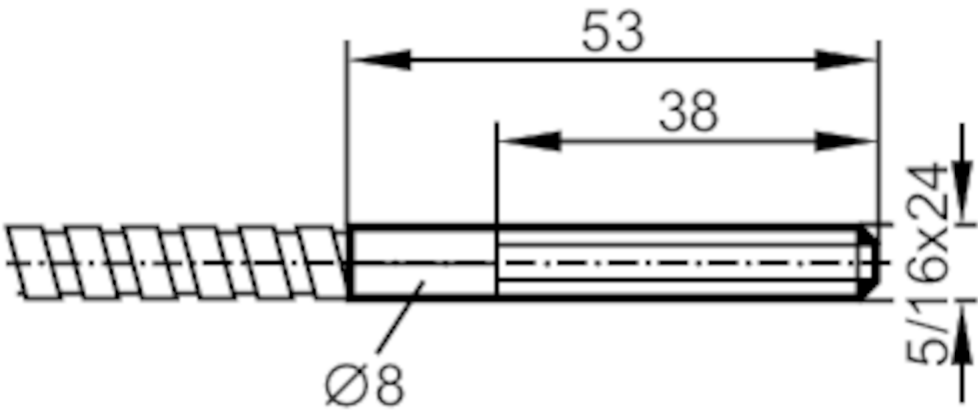

Application		
Function principle		Diffuse reflection sensor
Detection zone		
Range with fibre optic amplifier type		OBF; ODF; OMF
OBF		
Range fibre optics	[mm]	150
ODF		
Range fibre optics	[mm]	1
OMF		
Range fibre optics	[mm]	175
Operating conditions		
Ambient temperature	[°C]	-58...315

E20822



Fibre optic diffuse reflection sensor

FT-50-V-V-M5/16

Mechanical data		
Weight	[g]	125
Version of sensing head		straight
Total length	[mm]	900
Min. bending radius	[mm]	19
Fibre arrangement		⓪
Fibre material		glass
Fibre head material		stainless steel (1.4305 / 303)
Fibre sheath material		stainless steel (1.4305 / 303)
Accessories		
Accessories (supplied)		hexagon nuts: 2
		clamping rings: 2
		O-rings: 2
Remarks		
Pack quantity		1 pcs.