




## Ethernet connection cable

VSTGN040ZDS0010L04STGN04ZDS

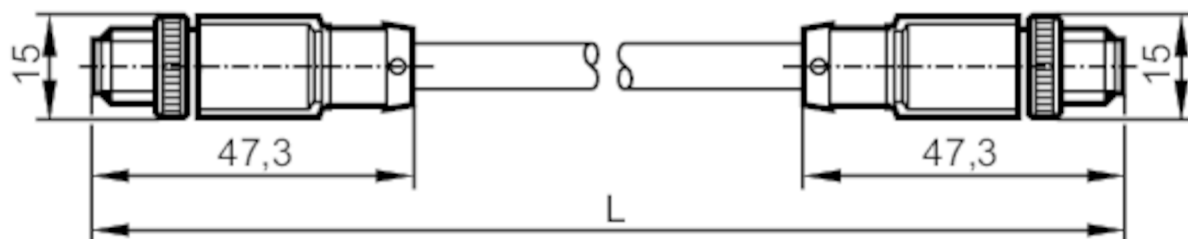

## Application

Design

Ethernet cable

## Electrical data

|                         |     |                   |
|-------------------------|-----|-------------------|
| Operating voltage       | [V] | < 50 AC / < 60 DC |
| Protection class        |     | III               |
| Max. current load total | [A] | 4                 |

## Operating conditions

|                     |      |          |
|---------------------|------|----------|
| Ambient temperature | [°C] | -20...90 |
| Protection          |      | IP 67    |

## Mechanical data

|              |      |                             |
|--------------|------|-----------------------------|
| Weight       | [g]  | 707.8                       |
| Dimensions   | [mm] | 15 x 15 x 47.3              |
| Materials    |      | TPU                         |
| Material nut |      | diecast zinc / diecast zinc |

## Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

## Electrical connection

Cable: 10 m, PVC, green, shielded; 4 x 0.34 mm<sup>2</sup>

## Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected

Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected

# E21137



## Ethernet connection cable

VSTGN040ZDS0010L04STGN04ZDS



### Connection

