


E2M232



MONITOR Analogue Video Input/1 Port

MONITOR ANALOGUE VIDEO INPUT/2 PORT

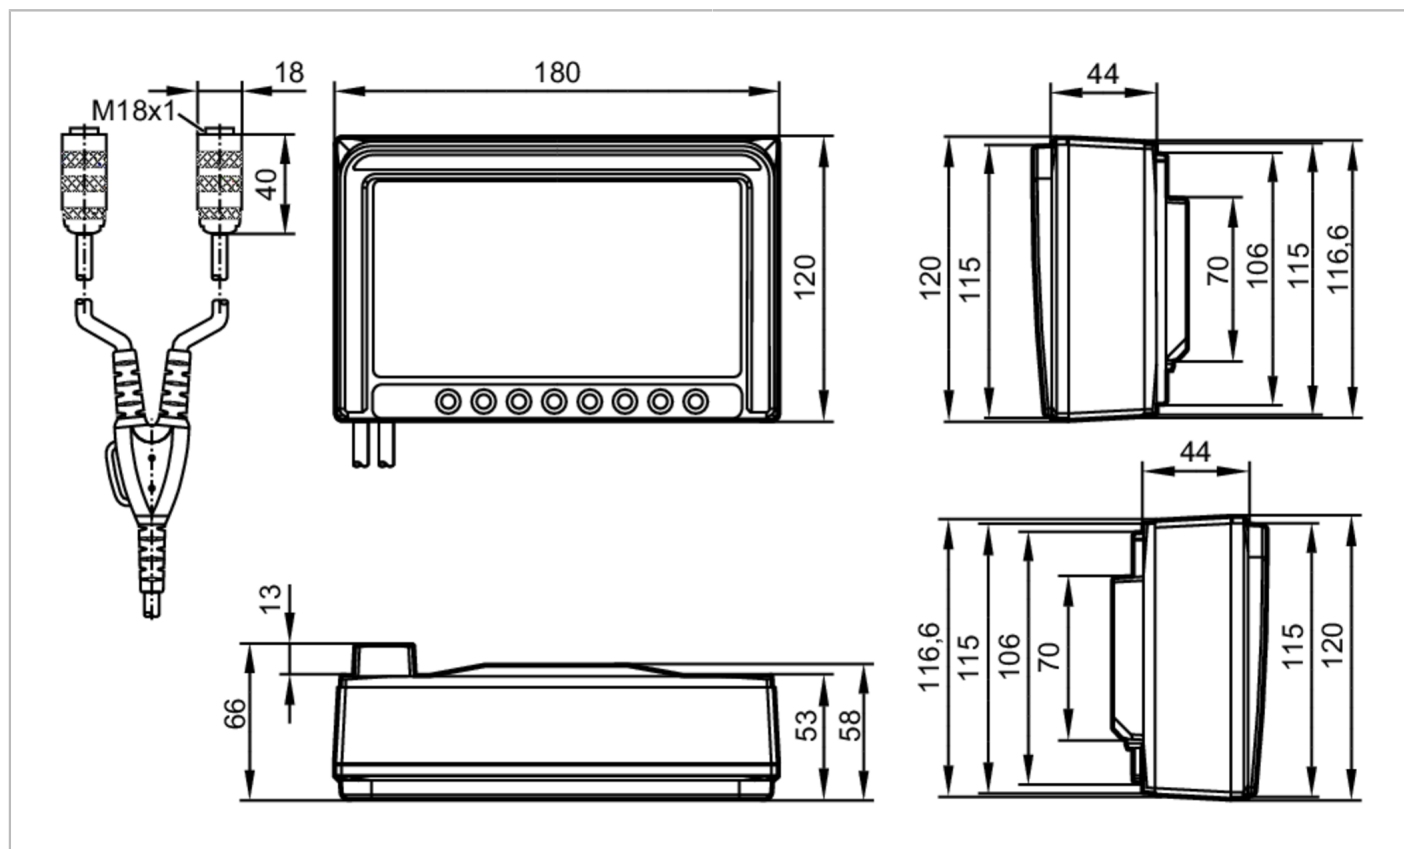

Application		
Application	Monitor for up to 2 O2M2xx / O3M2xx cameras	
Electrical data		
Operating voltage	[V]	18...30 DC; (± 10%)
Overvoltage protection		yes
Power supply for camera	[mA]	2000; (± 10%)
Inputs		
Video input	1 Vtt, 75 Ω, PAL 50 Hz, 4,43 MHz color sub carr	
Outputs		
Analogue current output	[mA]	...2000; (± 10%)
Operating conditions		
Ambient temperature	[°C]	-40...85
Storage temperature	[°C]	-40...125
Protection	IP 67	
Tests / approvals		
Shock resistance		15,3 G(rms) Frequency range 24...2000 Hz PSD 0,04...0,10 g²/Hz
Mechanical data		
Weight	[g]	1310
Materials	housing: ABS black; fixture: aluminium black	

E2M232



MONITOR Analogue Video Input/1 Port

MONITOR ANALOGUE VIDEO INPUT/2 PORT


Displays / operating elements	
Display type	colour display
Display size	7"
Electrical connection	
Connection	socket
Remarks	
Pack quantity	1 pcs.
Electrical connection - socket	
Cable: 2 m	
1	coax cable core video signal
2	coax screen video GND
3	U+
4	0 V
Connector: 2 x M16	



MONITOR Analogue Video Input/1 Port

MONITOR ANALOGUE VIDEO INPUT/2 PORT

Connection

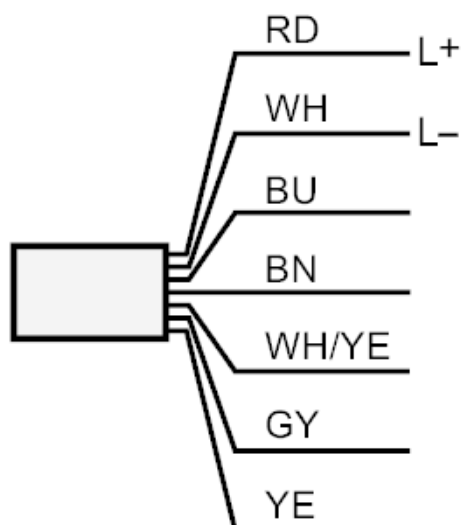

RD:	L+
WH:	L-
BU:	activate camera 1
BN:	activate camera 2
WH/YE:	activate camera 3
GY:	activate camera 4 tachometer
YE:	hand brake