


E30406



Voltage converter

VOLTAGE CONVERTER

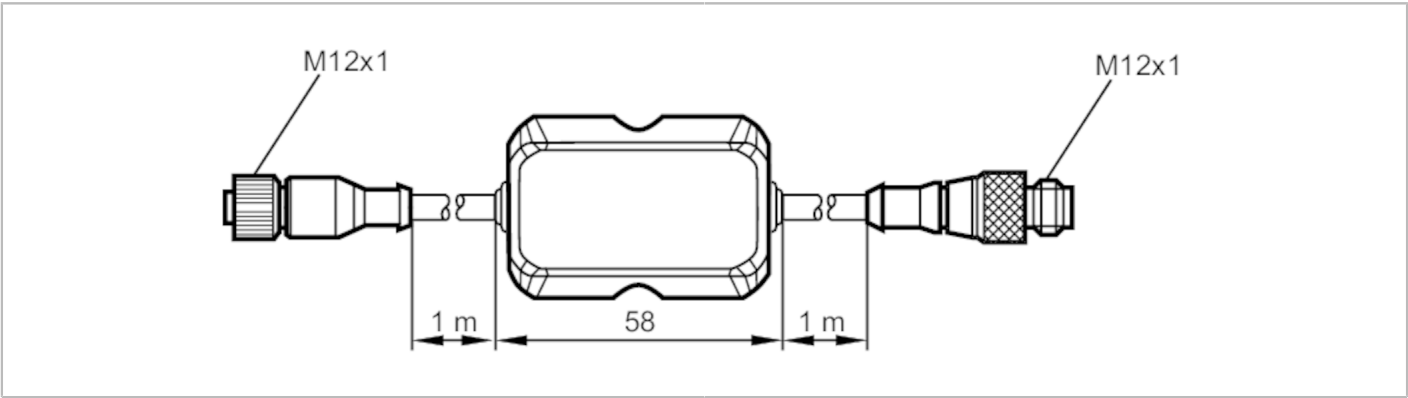

Electrical data		
Nominal voltage DC	[V]	9...27
Current consumption	[mA]	< 500
Protection class		III
Reverse polarity protection		yes
Outputs		
Short-circuit protection		yes
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 40
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 15 kV AD
	EN 61000-4-3 HF radiated	30 V/m (80...1000 MHz)
	EN 61000-4-4 Burst	2 kV coupling clamp
	EN 61000-4-6 HF conducted	10 V (0,15...80 MHz)
Mechanical data		
Weight	[g]	151
Materials	PBT-GF20; Cable: PUR; connector housing: TPU orange; Sealing: FKM; Lock nut: brass nickel-plated	
Remarks		
Pack quantity	1 pcs.	

E30406




Voltage converter

VOLTAGE CONVERTER

Electrical connection

Connection

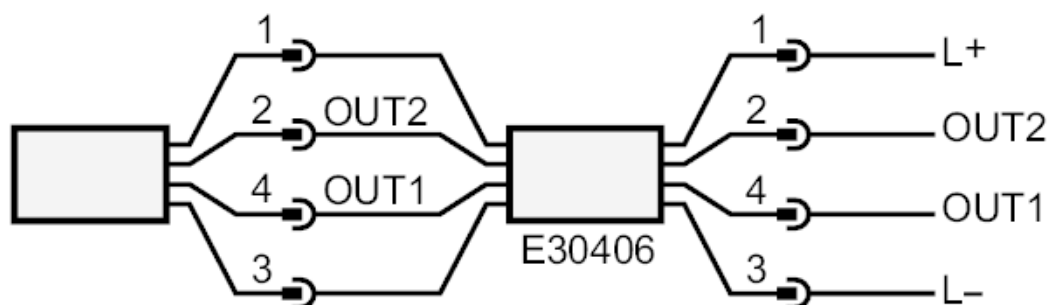

Connector: 1 x M12