


E30436



Jumper cable with valve plug

PLUG M12 - DIN VALVE FORM A

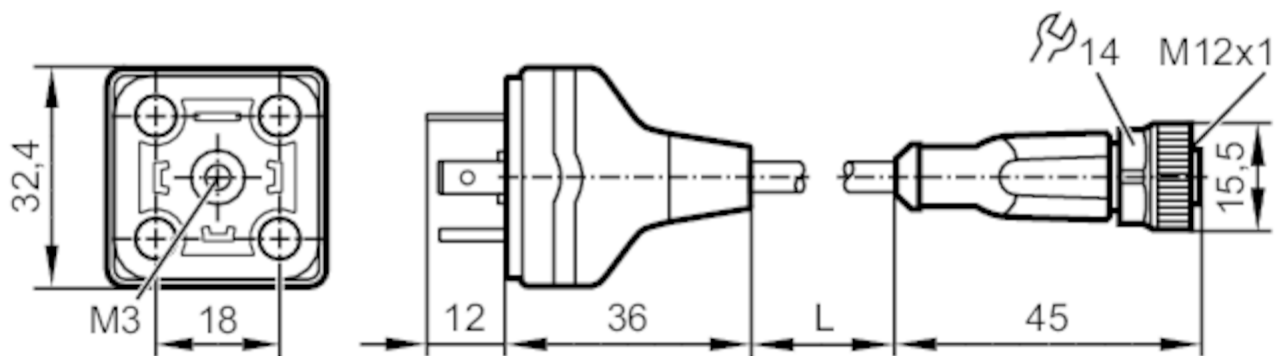

Application

Free from silicone yes

Electrical data

Operating voltage [V] < 50 AC / < 60 DC

Max. current load total [A] 4

Operating conditions

Ambient temperature [°C] -25...85

Protection IP 65

Mechanical data

Weight [g] 67.8

Materials plug: TPU black; socket: TPU orange; Sealing: FKM

Material nut brass / brass

Remarks


Pack quantity 1 pcs.

Electrical connection

Cable: 0.4 m, PUR, Halogen-free, black, Ø 5.5 mm; 5 x 0.50 mm²

Electrical connection - socket

Connector: 1 x M12, straight; Locking: brass, nickel-plated; Tightening torque: 0.6...1.5 Nm



E30436




Jumper cable with valve plug


PLUG M12 - DIN VALVE FORM A

Electrical connection - plug

Connector: 1 x valve type A DIN, straight; Locking: brass, nickel-plated; Tightening torque: 0.6...1.5 Nm



Connection

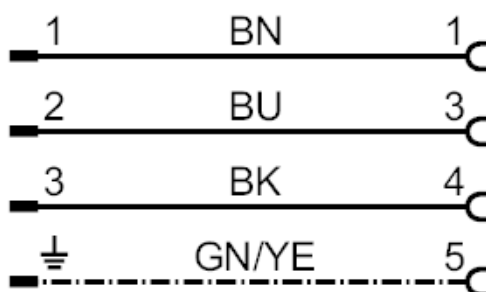

Core colours :

BK =	black
BN =	brown
BU =	blue
GN/YE =	green/yellow