




Process adapter for SMS pipe fitting

ADAPT IFM-SMS DN50 (2)

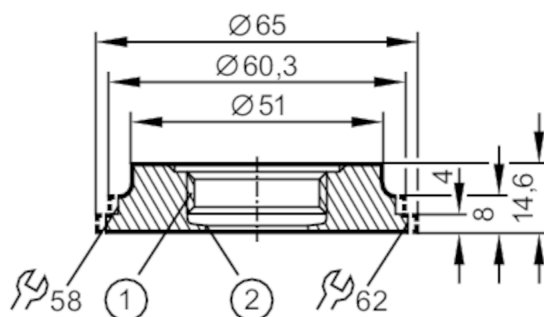

- 1 Aseptoflex thread
2 Aseptoflex sealing edge

EC 1935/2004 

Application		
Pressure rating	[bar]	25
Mechanical data		
Weight	[g]	273.8
Materials		stainless steel (1.4404 / 316L)
Sensor connection		Aseptoflex
Process connection		SMS pipe fitting DN50 (2")
Surface characteristics Ra/Rz of the wetted parts		0.4 / 4
Hygienic equipment class to DIN 11866		H4
Remarks		
Notes		discontinued article
Pack quantity		1 pcs.