


Process adapter for SMS pipe fitting

ADAPT IFM-SMS DN50/2"

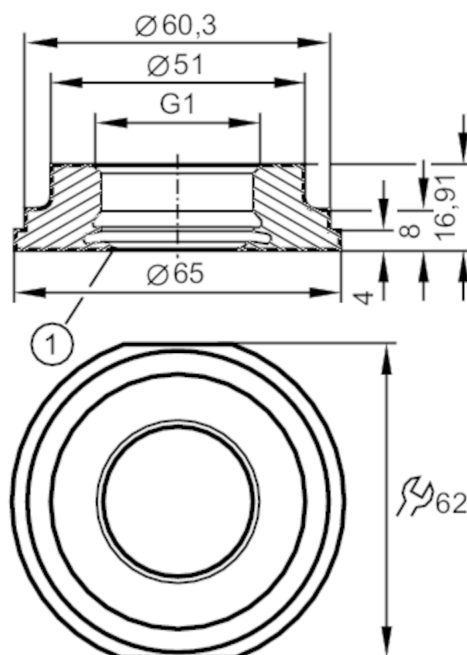

1 sealing edge

EC 1935/2004 EHEDG Certified 

Application		
Pressure rating	[bar]	25
Mechanical data		
Weight	[g]	273.6
Materials		stainless steel (1.4435 / 316L)
Sensor connection		G 1 external thread Aseptoflex Vario
Process connection		SMS pipe fitting DN50 (2")
Surface characteristics Ra/Rz of the wetted parts		0.4 / 4
Sealing		metal to metal
Hygienic equipment class to DIN 11866		H4
Remarks		
Pack quantity		1 pcs.