


E3M161



Connection cable

VIDEO ADAPTER CABLE M12 M16

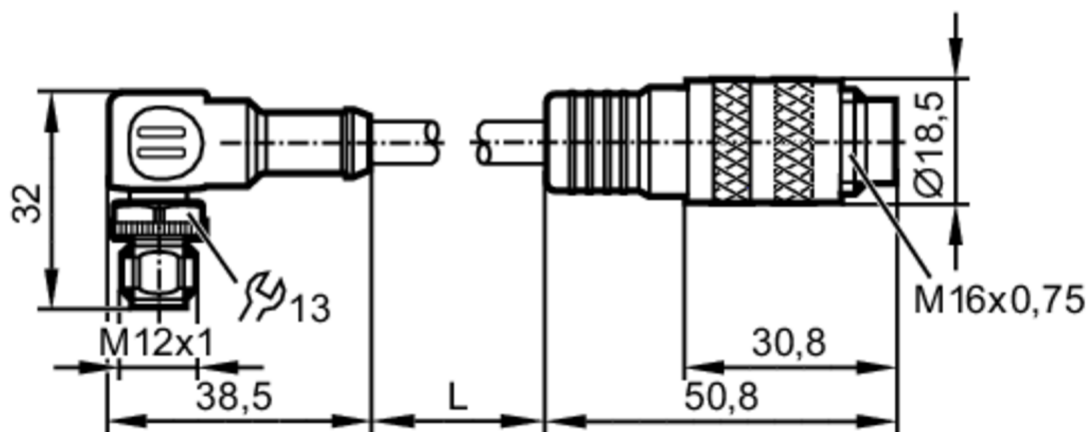


Application		
Design	for 3D Smart sensor mobile with analogue video output PAL	
Operating conditions		
Ambient temperature	[°C]	-40...80
Ambient temperature (moving)	[°C]	-10...70
Protection	IP 67; IP 69K	
Mechanical data		
Weight	[g]	93.9
Materials	PUR black; sealing ring: FKM; contact pins: CuSn6 nickel-plated and tin-plated;	
Material nut	stainless steel (1.4305 / 303) / stainless steel (1.4305 / 303)	
Drag chain suitability	bending radius for fixed installation	≥ 60 mm
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Cable: 1 m, PUR, black, Ø 6 mm, shielded; 2 x 0.25 mm²		
Electrical connection - plug		
Connector: 1 x M12, angled; Moulded body: PUR; Locking: stainless steel (1.4305 / 303); Shielded connection cable: screen connected		
Connector: 1 x M16, straight; Moulded body: PUR; Locking: stainless steel (1.4305 / 303); Shielded connection cable: screen connected		

E3M161



Connection cable

VIDEO ADAPTER CABLE M12 M16



Connection

