


E40129



Process adapter for small volumetric flow quantities

FLOW ADAPT SI

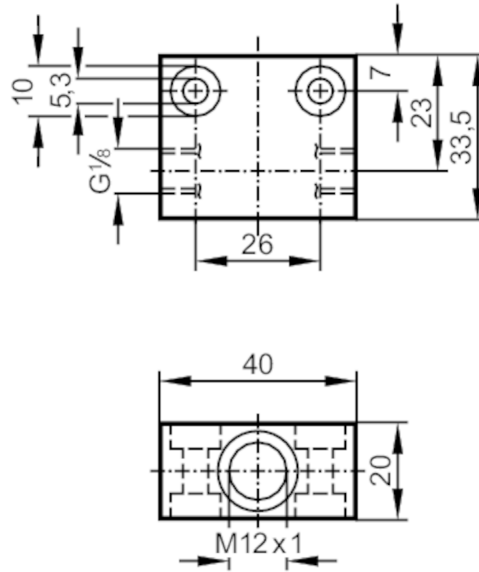

Application		
Design		for flow sensors and flow monitors mit_Adapter_singular
Application		for industrial applications
Installation		via internal G1/8A male thread, any mounting position
Media		liquids and gases
Medium temperature	[°C]	0...80; (Temperature gradient: 1 K/min)
Pressure rating	[bar]	300
Measuring/setting range		
Flow range	[ml/min]	2...100
Tests / approvals		
Pressure Equipment Directive	Sound Engineering Practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data		
Weight	[g]	155.8
Dimensions	[mm]	M12 x 1
Thread designation		M12 x 1
Materials		stainless steel (1.4404 / 316L)
Sensor connection		M12 x 1
Process connection		G 1/8
Accessories		
Accessories (supplied)		sealings: 1, U-seal
Accessories (optional)		Adapter: ≤ 30 bar, E40101
		Adapter: ≤ 300 bar, E40236
Remarks		
Pack quantity		1 pcs.