


E60206



Flexible coupling for encoders

COUPLING 25-6-63-32-KV

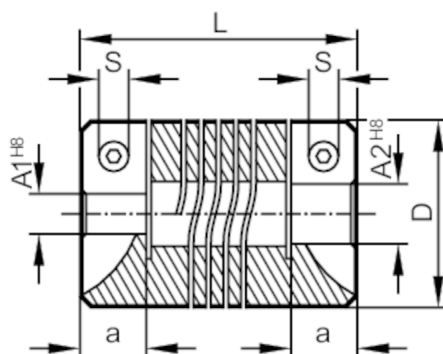

Mechanical data

Weight	[g]	36.6
Materials		aluminium
External diameter D	[mm]	25
inside diameter A1	[mm]	6
inside diameter A2	[mm]	6,35 mm / 1/4 inch / 1/4"
Length L	[mm]	32
depth of the clamping hub	[mm]	8
Clamp screw	[mm]	M3 x 10 ISO4762 (2x)
Max. revolution, mechanical [U/min]		6000
Max. axial shaft misalignment [mm]		± 0,5
Max. radial shaft misalignment [mm]		± 0,35
Max. angular displacement [°]		± 4,0

Remarks

Remarks	The data indicated apply to couplings with the above hub borings at an ambient temperature of 23 °C. The values of radial, angular and axial displacement are maximum values which must not reach their maximum simultaneously while in operation.
Pack quantity	1 pcs.