


E60208



Flexible coupling for encoders

COUPLING 30-10-12-38-KV

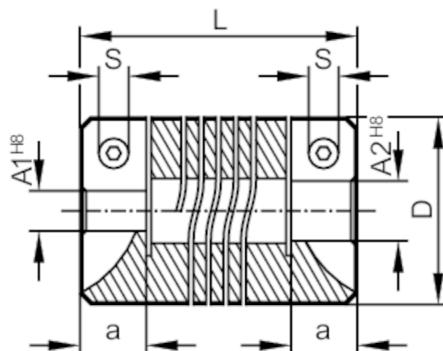

Mechanical data

Weight	[g]	58.2
Materials		aluminium
External diameter D	[mm]	30
inside diameter A1	[mm]	10
inside diameter A2	[mm]	12,7 mm / 1/2 " / 1/2 inch
Length L	[mm]	38
depth of the clamping hub	[mm]	10
Clamp screw	[mm]	M4 x 12 ISO4762 x2
Max. revolution, mechanical [U/min]		6000
Max. axial shaft misalignment [mm]		± 0,5
Max. radial shaft misalignment [mm]		± 0,35
Max. angular displacement [°]		± 4,0

Remarks

Remarks	The data indicated apply to couplings with the above hub borings at an ambient temperature of 23 °C. The values of radial, angular and axial displacement are maximum values which must not reach their maximum simultaneously while in operation.
Pack quantity	1 pcs.