

E70064




Y connection cable

YDOAH032MSS01,5H03STGH040MSS

Status Archive

/EVC437

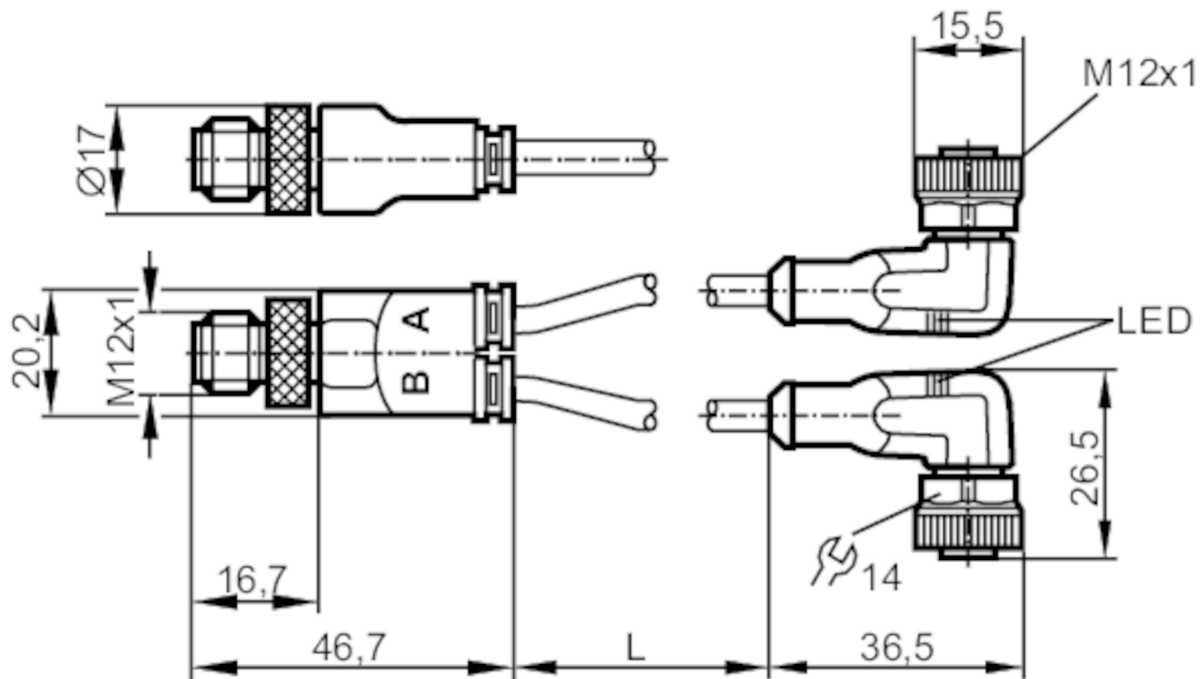

Electrical data

Operating voltage	[V]	10...30 DC
Max. current load total	[A]	4

Operating conditions

Ambient temperature	[°C]	-25...90
Protection		IP 67

Mechanical data

Weight	[g]	132.6
Materials	connector housing: TPU black; socket housing: TPU black transparent; Sealing: FKM	
Material nut	brass / brass	
Number of ports splitter box	2	

Displays / operating elements

Display	switching status	1 x LED, yellow
	operation	1 x LED, green

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 1.5 m, PUR, black, Ø 4.9 mm; 3 x 0.34 mm² (42 x Ø 0.1 mm)

Electrical connection - socket

Connector: 2 x M12; Locking: brass, nickel-plated; Tightening torque: 0.6...1.5 Nm

E70064



Y connection cable

YDOAH032MSS01,5H03STGH040MSS




Electrical connection - plug

Connector: 2 x M12; Locking: brass, nickel-plated; Tightening torque: 0.6...1.5 Nm



Connection

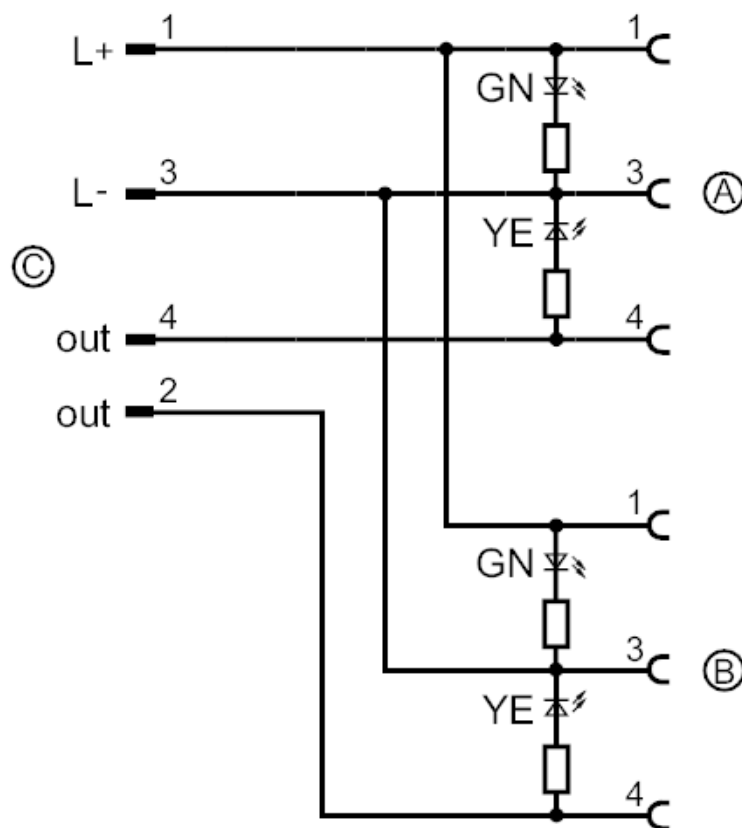

Status Archive

/EVC437