




AS-Interface flat cable insulation displacement
connector

FLAT CABLE CONNECTOR M12

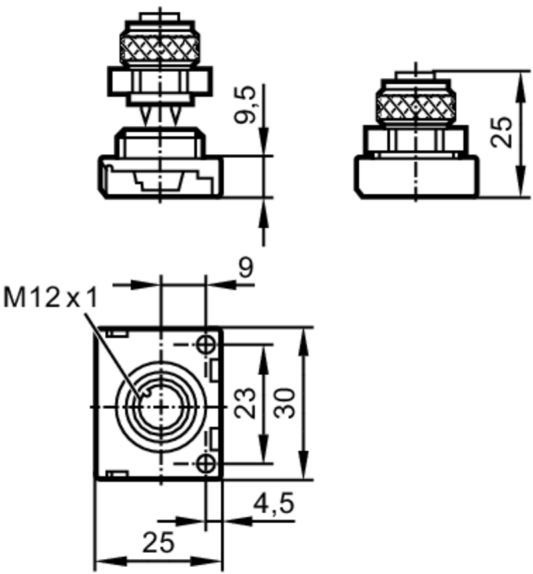

Application

Design M12 socket for AS-i flat cable

Electrical data

Max. current load total [A] 2

Operating conditions

Ambient temperature [°C] -25...75

Protection IP 67

Mechanical data

Weight [g] 17.4

Materials PA

Remarks

Remarks installation instructions First separate the fixture (orange) from the insulation displacement connector.
Insert the cable in the fixture and close it again.
Screw the fixture back on the insulation displacement connector.

Pack quantity 1 pcs.

Electrical connection - socket

connection to AS-Interface flat cable

yellow 1 AS-i +
yellow 2 not used
yellow 3 AS-i -
yellow 4 not used


Connector: 1 x M12; Moulded body: PA

E70096



AS-Interface flat cable insulation displacement connector

FLAT CABLE CONNECTOR M12



Connection