


E70224



Connection cable

VSTGH050MSS01,5B03VDAA041--S

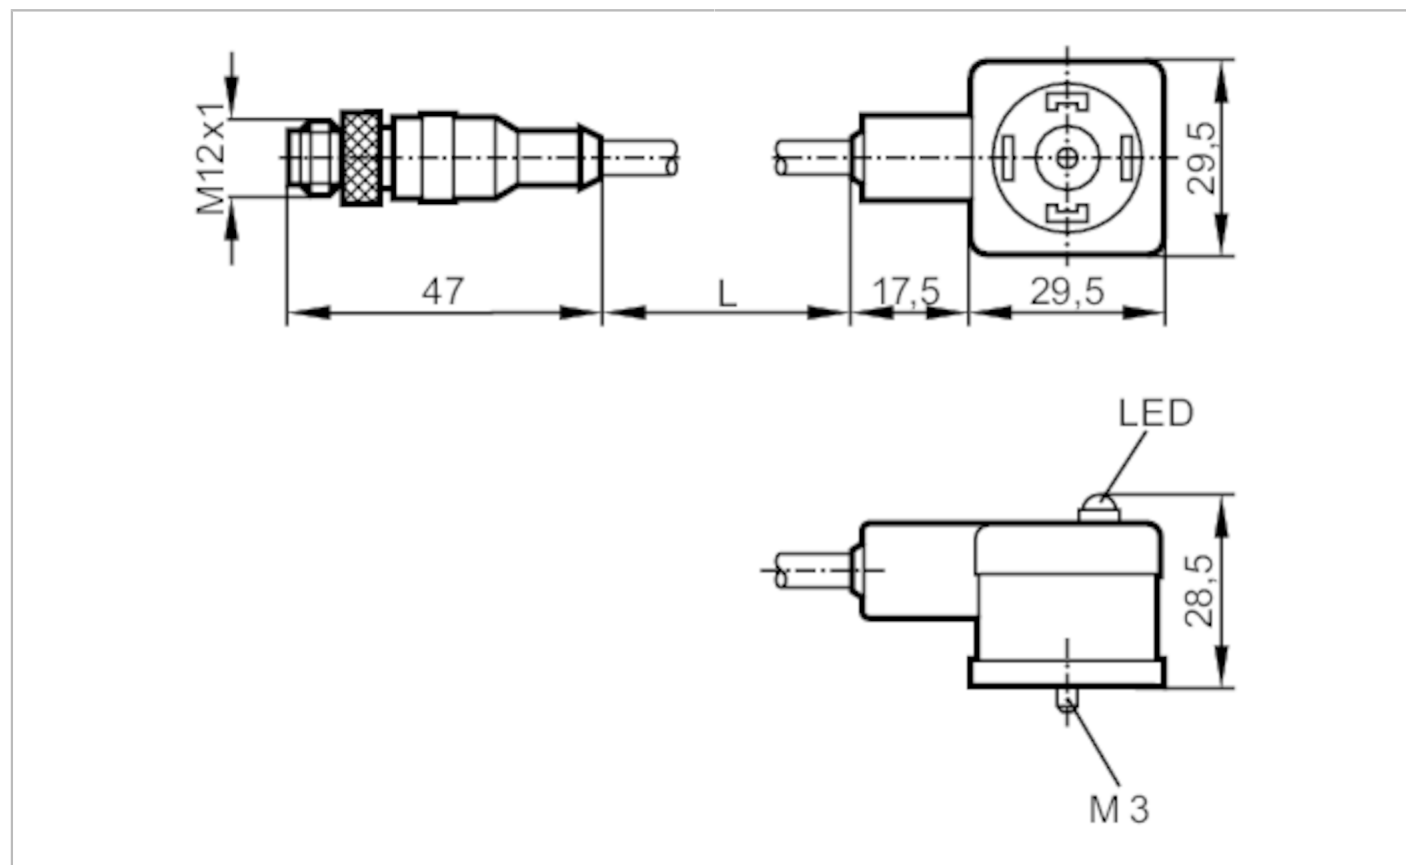

Application		
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 24 AC/DC
Overvoltage protection		free-wheeling diode
Operating conditions		
Ambient temperature	[°C]	-25...90
Protection		IP 67
Mechanical data		
Weight	[g]	116
Materials		TPU
Material nut		brass / brass
Displays / operating elements		
Display	operation	1 x LED, green
Accessories		
Accessories (supplied)		screw panel for labelling
Remarks		
Pack quantity		1 pcs.



Connection cable

VSTGH050MSS01,5B03VDAA041--S

Electrical connection

Cable: 1.5 m, PUR / PVC, Halogen-free; 3 x 0.5 mm² (42 x Ø 0.1 mm)


Electrical connection - socket

Connector: 1 x valve type A DIN, angled; Moulded body: TPU; Locking: brass, nickel-plated; Contacts: nickel-plated brass



Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: TPU; Locking: brass, nickel-plated; Contacts: gold-plated



Connection

