


E7354A



AS-Interface flat cable insulation displacement connector

FCE Splitter ye/bk II 3D/3G

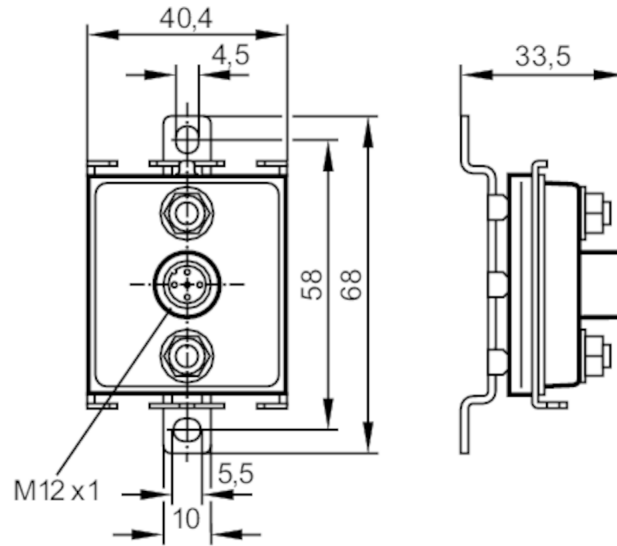

Electrical data		
Operating voltage	[V]	24 DC; (to PELV)
Protection class		III
Max. current load total	[A]	2
Outputs		
Electrical design		AS-i
Operating conditions		
Ambient temperature	[°C]	0...60
Protection		IP 67; (outside hazardous areas: IP 68 / IP 69K)
Tests / approvals		
ATEX marking		II 3G Ex nA II T6 Gc X
		II 3D Ex tc IIIC T 70°C Dc X
Mechanical data		
Weight	[g]	138.8
Materials		metal parts: stainless steel (1.4404 / 316L); rubber gasket for contact pins: FKM; Sealing: EPDM
Accessories		
Accessories (optional)		Torque wrench:, E70390
Remarks		
Remarks		Use M12 connectors with hexagon nuts, tightening torque 0.8 Nm.
Pack quantity		1 pcs.

E7354A




AS-Interface flat cable insulation displacement connector

FCE Splitter ye/bk II 3D/3G

Electrical connection - socket

1	AS-i +
2	0 V
3	AS-i -
4	+ 24 V
5	n. c.

Connector: 1 x M12



Connection