


E7377A



AS-Interface flat cable splitter

FC Splitter yelye II 3D/3G

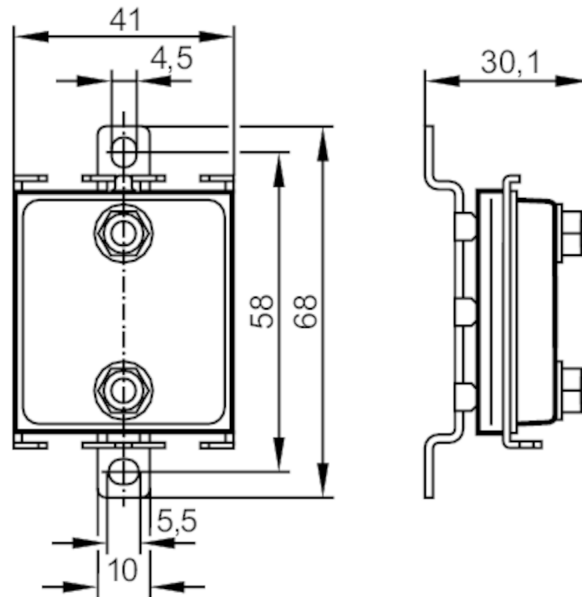

Application

Application for the distribution of the AS-i voltage or the external 24 V supply

Electrical data

Protection class	III
Max. current load total [A]	8

Outputs

Electrical design	AS-i
-------------------	------

Operating conditions

Ambient temperature [°C]	0...60
Protection	IP 67; (outside hazardous areas: IP 68 / IP 69K)

Tests / approvals

ATEX marking	II 3G Ex nA II T6 Gc X
	II 3D Ex tc IIIC T 70°C Dc X

Mechanical data

Weight [g]	135
Materials	metal parts: stainless steel (1.4404 / 316L); rubber gasket for contact pins: FKM; Sealing: EPDM
Tightening torque [Nm]	2.5; (Mounting screw)

Accessories

Accessories (optional)	Torque wrench:, E70390 flat cable blank:, E70299
------------------------	---

Remarks

Pack quantity	1 pcs.
---------------	--------