


E74310



AS-Interface flat cable

Flat cable 100 m Process bk

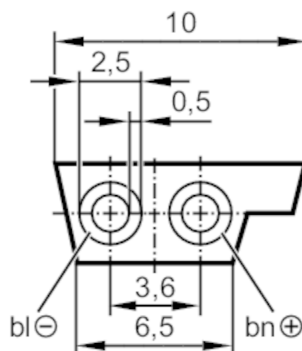

Application

Design	for use of insulation displacement technology
Application	food industry

Electrical data

Operating voltage	[V]	26.5...31.6 DC; (Peak voltage 300 V)
-------------------	-----	--------------------------------------

Outputs

Electrical design	AS-i
-------------------	------

Operating conditions

Ambient temperature	[°C]	-40...105
Protection		IP 67

Mechanical data

Weight	[g]	6825
--------	-----	------

Remarks

Remarks	100 m form supplied: coiled
Pack quantity	100 m

Electrical connection

Cable: 100 m, TPE-PVC compound, black; 2 x 1.5 mm²