




Connecting cable with socket

ADOGH080MSS0002K08

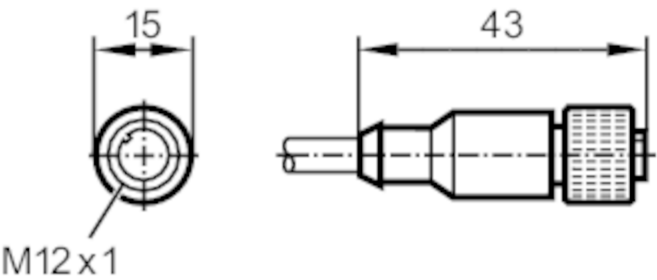


Electrical data		
Operating voltage	[V]	< 30 AC / < 36 DC
Protection class		III
Max. current load total	[A]	2
Operating conditions		
Ambient temperature	[°C]	-25...90
Protection		IP 67
Mechanical data		
Weight	[g]	145.2
Dimensions	[mm]	15 x 15 x 43
Materials		TPU
Material nut		brass
Remarks		
Notes	For 8-pole sockets the core colours are not standardised.; Please note the wiring of the sensor and the sockets (see data sheet).	
Pack quantity	1 pcs.	
Electrical connection		
Cable: 2 m, PUR, black, shielded; 8 x 0.25 mm ² (14 x Ø 0.15 mm)		
Electrical connection - socket		
Connector: 1 x M12, straight; Moulded body: TPU; Locking: brass, nickel-plated; Tightening torque: 1...1.5 Nm; Shielded connection cable: screen connected		

E80021




Connecting cable with socket

ADOGH080MSS0002K08



Connection

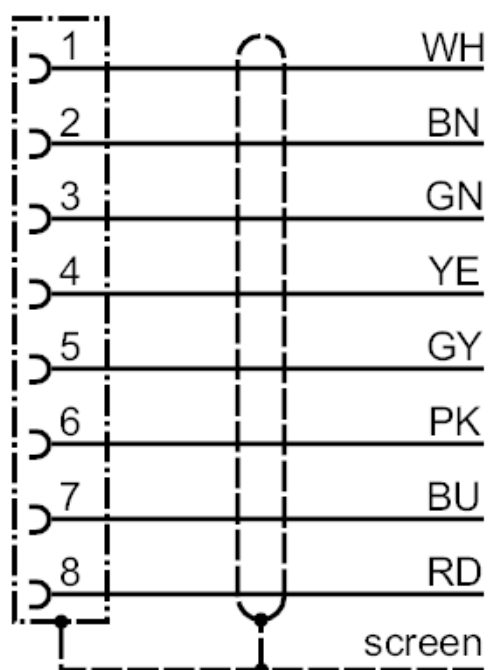

colours to DIN
47100

Core colours :

BN =	brown
BU =	blue
GN =	green
GY =	grey
PK =	pink
RD =	red
WH =	white
YE =	yellow
screen =	screen