


E80022



Connecting cable with socket

ADOAH080MSS0002K08

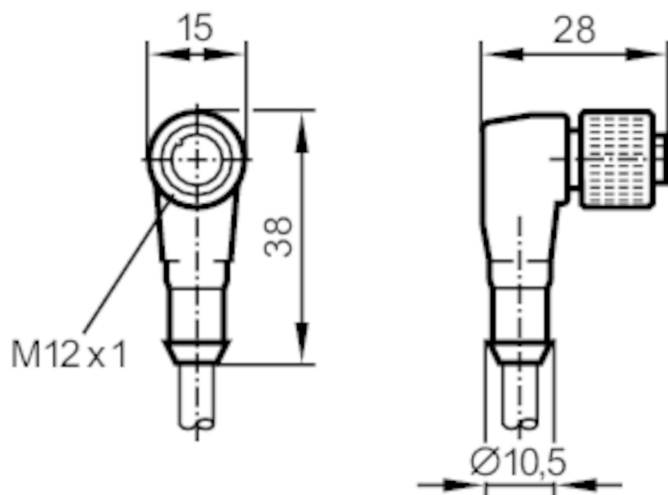

Electrical data

Operating voltage	[V]	< 30 AC / < 36 DC
Protection class		III
Max. current load total	[A]	2

Operating conditions

Ambient temperature	[°C]	-25...90
Protection		IP 67

Mechanical data

Weight	[g]	149.2
Dimensions	[mm]	28 x 15 x 38
Materials		TPU
Material nut		brass

Remarks

Notes	For 8-pole sockets the core colours are not standardised.; Please note the wiring of the sensor and the sockets (see data sheet).
Pack quantity	1 pcs.

Electrical connection

Cable: 2 m, PUR, black, shielded; 8 x 0.25 mm² (14 x Ø 0.15 mm)

Electrical connection - socket


Connector: 1 x M12, angled; Moulded body: TPU; Locking: brass, nickel-plated; Tightening torque: 1...1.5 Nm; Shielded connection cable: screen connected

E80022




Connecting cable with socket

ADOAH080MSS0002K08



Connection

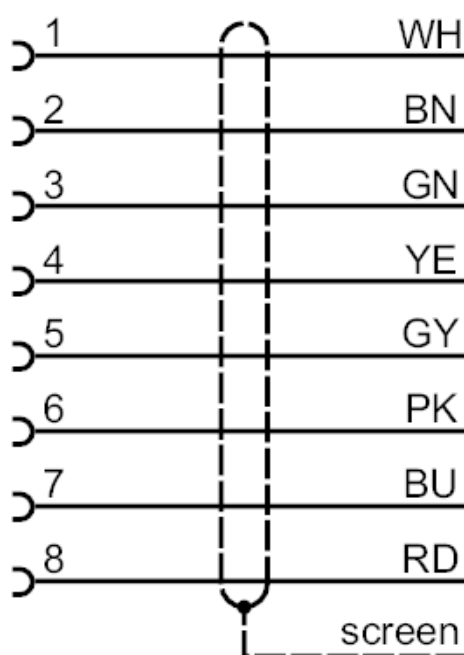

colours to DIN
47100

BU =	blue
GN =	green
GY =	grey
PK =	pink
RD =	red
WH =	white
YE =	yellow
screen =	screen