




Splitter box

ZDO4H050MSS0000-00STAK120MSS

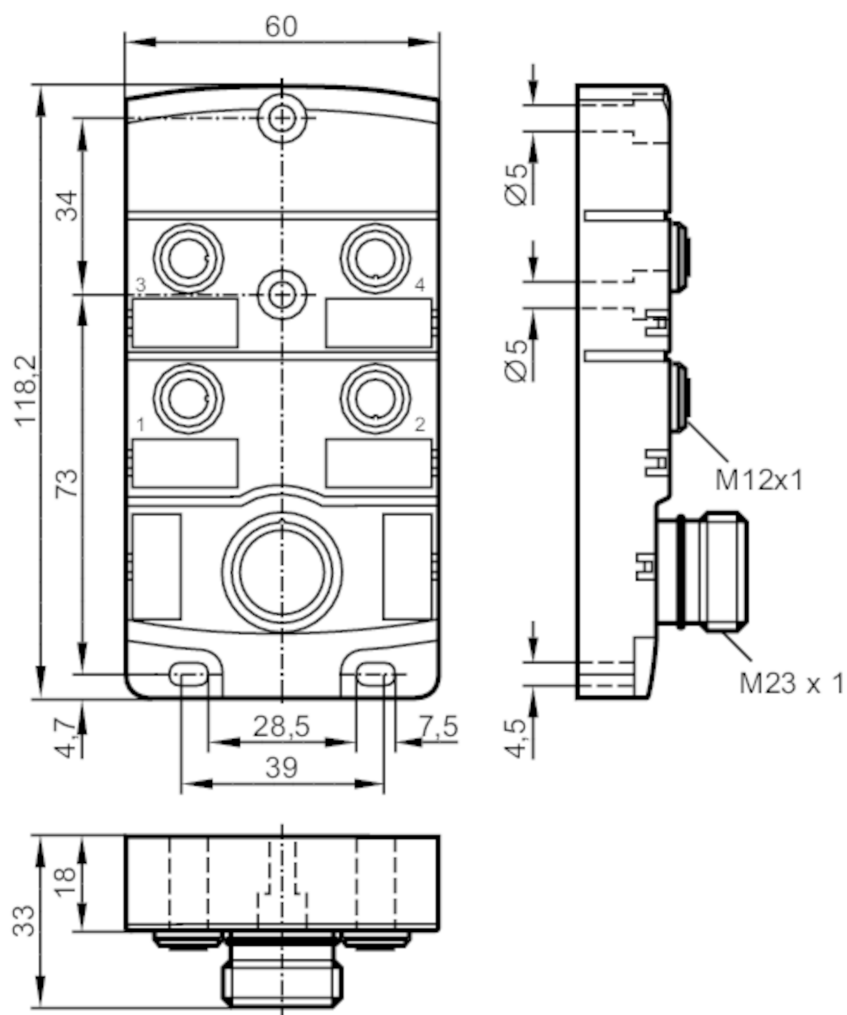

Application

Free from silicone	yes
--------------------	-----

Electrical data

Operating voltage	[V]	< 30 AC/DC; ("supply class 2" to cULus)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	12

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67; ("enclosure type 1" according to cULus)



Splitter box

ZDO4H050MSS0000-00STAK120MSS

Mechanical data		
Weight	[g]	222.2
Dimensions	[mm]	33 x 60 x 118.2
Materials		PA
Number of ports splitter box		4
Connector type		M12

Accessories		
Accessories (supplied)		Protective caps: 2 labels: 4


Remarks		
Pack quantity		1 pcs.

Electrical connection - Connection

Connector: 1 x M23; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm



Connection

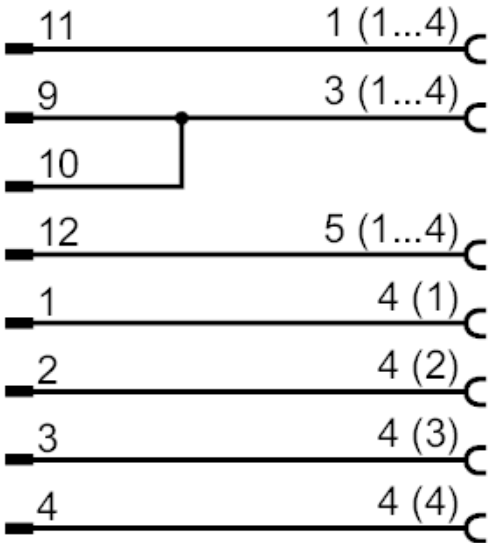

Electrical connection - slot

Connector: 4 x M12; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

EBC001



Splitter box

ZDO4H050MSS0000-00STAK120MSS

