




Splitter box

ZDO6H050MSS0000-00STAK190MSS

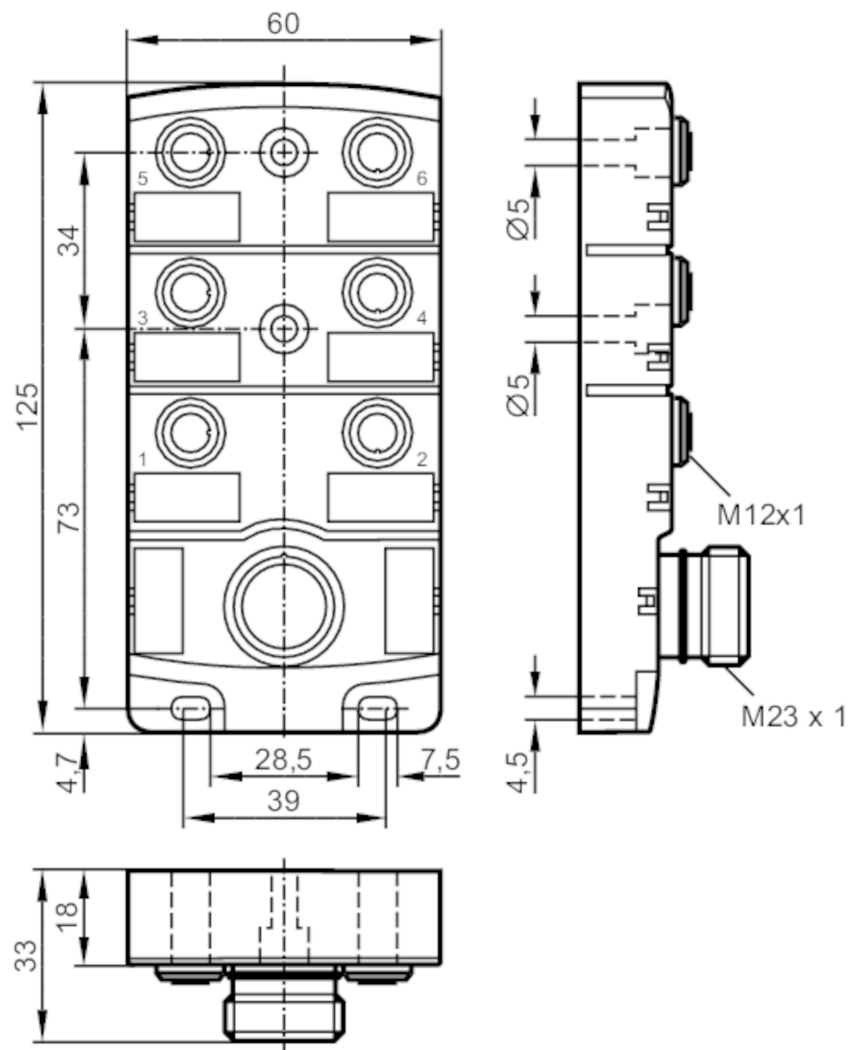

Application		
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 30 AC/DC; ("supply class 2" to cULus)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	12
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67; ("enclosure type 1" according to cULus)



Splitter box

ZDO6H050MSS0000-00STAK190MSS


Mechanical data		
Weight	[g]	244.2
Materials		PA
Number of ports splitter box		6
Connector type		M12

Accessories		
Accessories (supplied)		Protective caps: 2
		labels: 6

Remarks		
Pack quantity		1 pcs.

Electrical connection - Connection

Connector: 1 x M23; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm



Connection

+	19	1 (1...6)	C
-	6	3 (1...6)	C
⊥	12	5 (1...6)	C
	15	4 (1)	C
	7	2 (1)	C
	5	4 (2)	C
	4	2 (2)	C
	16	4 (3)	C
	8	2 (3)	C
	3	4 (4)	C
	14	2 (4)	C
	17	4 (5)	C
	9	2 (5)	C
	2	4 (6)	C
	13	2 (6)	C

Electrical connection - slot

Connector: 6 x M12; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

EBC007



Splitter box

ZDO6H050MSS0000-00STAK190MSS

