




Splitter box

ZDO6H05DMSS0000-00STAK190MSS

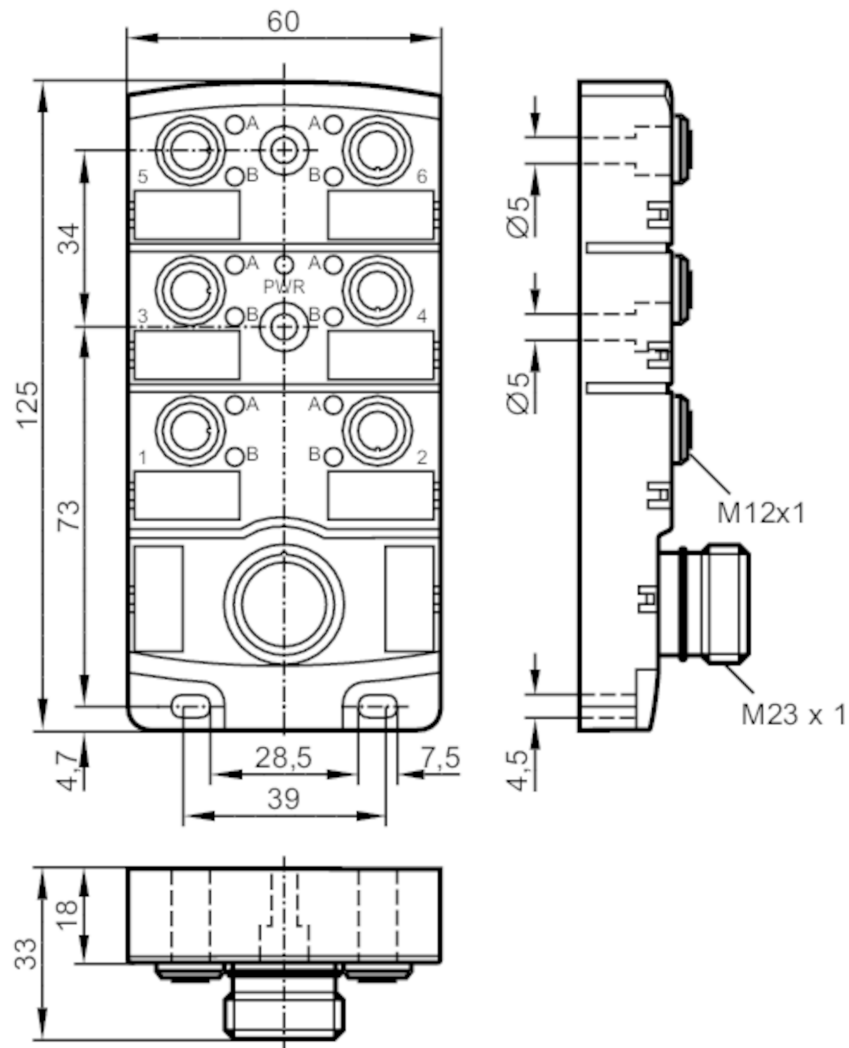

Application

Free from silicone yes

Electrical data

Operating voltage [V] 10...30 DC; ("supply class 2" to cULus)

Max. current load per module/slot [A] 4

Max. current load total [A] 10

Outputs


Electrical design PNP



Splitter box

ZDO6H05DMSS0000-00STAK190MSS


Operating conditions		
Ambient temperature	[°C]	-25...80
Protection	IP 67; ("enclosure type 1" according to cULus)	
Mechanical data		
Weight	[g]	238.2
Materials	PA	
Number of ports splitter box	6	
Connector type	M12	
Displays / operating elements		
Display	switching status	12 x LED, yellow
	operation	1 x LED, green
Accessories		
Accessories (supplied)	Protective caps: 2 labels: 6	
Remarks		
Pack quantity	1 pcs.	
Electrical connection - Connection		
Connector: 1 x M23; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm		



Splitter box

ZDO6H05DMSS0000-00STAK190MSS

Connection

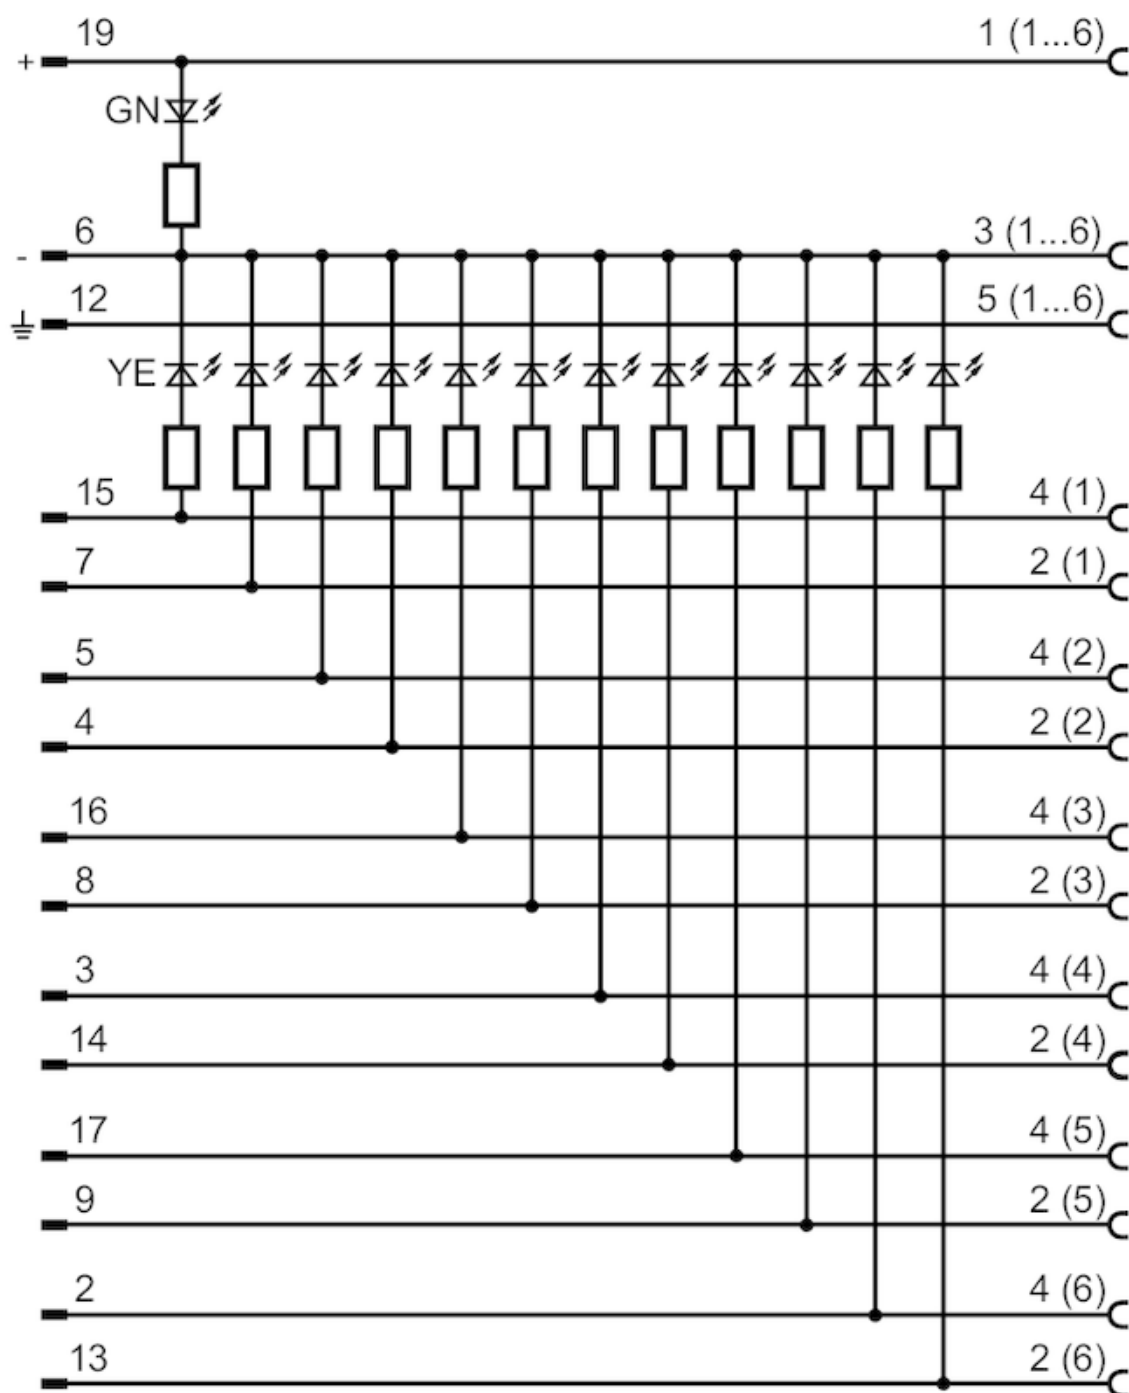

EBC008



Splitter box

ZDO6H05DMSS0000-00STAK190MSS

Electrical connection - slot

Connector: 6 x M12; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

